

GRADING GENERAL NOTES:

1. ALL GRADING SHALL BE DONE IN ACCORDANCE WITH THE CITY OF HUNTINGTON BEACH REQUIREMENTS.
2. CITY OF HUNTINGTON BEACH GRADING INSPECTOR IS TO BE NOTIFIED 48 HOURS PRIOR TO ANY GRADING AT THE DEPARTMENT OF PUBLIC WORKS, (714) 536-5431.
3. DUST SHALL BE CONTROLLED BY WATERING.
4. REMOVE ALL VEGETATION AND DEBRIS PRIOR TO ANY GRADING, INSPECTION IS REQUIRED.
5. ALL WORK WITHIN THE PUBLIC RIGHT-OF-WAY REQUIRES A SEPARATE ENCROACHMENT PERMIT.
6. IMPORT SOIL SHALL BE A GRANULAR MATERIAL WITH LOW EXPANSION POTENTIAL AND SHALL BE COMPACTED TO AT LEAST 90%.
7. THE SUBGRADE OF THE DRIVEWAY AND PARKING AREAS SHALL BE SCARIFIED, BROUGHT TO OPTIMUM MOISTURE CONTENT, AND COMPACTED TO AT LEAST 90%. CALL FOR CITY INSPECTION PRIOR TO PLACING CLASS 2 AGGREGATE BASE AND CASTING OF CONCRETE GUTTERS.
8. A SOIL COMPACTION REPORT SHALL CERTIFY COMPACTION WITHIN BUILDING AND PAVING AREAS.
9. THE ENGINEER, OR A LICENSED LAND SURVEYOR, SHALL CERTIFY LINE AND GRADE OF FINISH FLOOR FORMS.
10. THE SOILS ENGINEER SHALL CERTIFY THAT ALL GRADING HAS BEEN COMPLETED PER THE SOILS REPORT PRIOR TO FINAL RELEASE.
11. THE ENGINEER OR ARCHITECT OF RECORD SHALL CERTIFY THAT GRADES FOR ALL HARDSCAPE AND DRAINAGE DEVICES HAVE BEEN CONSTRUCTED PER APPROVED GRADING PLAN PRIOR TO FINAL RELEASE.
12. ALL GRADING SHALL BE DONE IN ACCORDANCE WITH APPROVED SOILS REPORT NOTED HEREIN.
13. STANDARD PLAN 100, SHEETS 1, 2, 3 AND 4 ARE INCORPORATED BY REFERENCE.
14. THE SOILS ENGINEER AND CIVIL ENGINEER SHALL NOT BE SUBSTITUTED WITHOUT PRIOR WRITTEN APPROVAL FROM THE DIRECTOR OF PUBLIC WORKS.
15. USE THE AMERICAN PUBLIC WORKS ASSOCIATION SOUTHERN CALIFORNIA CHAPTER (APWA) WORK AREA TRAFFIC CONTROL HANDBOOK (WATCH MANUAL) TENTH EDITION, 2006 WHEN WORKING IN THE STREETS OR ALLEYS. THE CITY INSPECTOR SHALL APPROVE BARRICADING PRIOR TO ANY WORK.
16. STANDARD PLAN 600 GENERAL NOTES ARE INCORPORATED BY REFERENCE.
17. ANY DAMAGE BY THE CONTRACTOR TO THE STREET LIGHTING STEM AND/OR TRAFFIC SIGNAL SYSTEM SHALL BE REPAIRED AND CONDUIT AND CONDUCTORS SHALL BE REPLACED PER CURRENT HUNTINGTON BEACH STANDARD PLANS AND STANDARD SPECIAL PROVISIONS FOR THE CONSTRUCTION OF TRAFFIC SIGNALS AND LIGHTING SYSTEMS IN THE CITY OF HUNTINGTON BEACH 2001 EDITION.

EROSION CONTROL GENERAL NOTES:

1. EROSION CONTROL IS REQUIRED FOR GRADING OPERATIONS DURING "DRY SEASON" REQUIREMENTS (MAY 1 THROUGH SEPTEMBER 30) AND FOR "WET SEASON" REQUIREMENTS (OCTOBER 1 THROUGH APRIL 30). APPROVED PLANS ARE REQUIRED FOR ALL ROUGH GRADING OPERATIONS.
2. IN CASE OF EMERGENCY CALL:

- (RESPONSIBLE PERSON) _____ (FIRM) _____
- AT _____
- (24 HOUR PHONE NO.) _____
3. THE DESIGN CIVIL ENGINEER WILL SUPERVISE EROSION CONTROL WORK AND ENSURE THAT WORK IS IN ACCORDANCE WITH THE APPROVED PLANS (IF REQUIRED).
4. THERE SHALL BE A "WEATHER TRIGGERED" ACTION PLAN AND THE ABILITY TO DEPLOY STANDBY SEDIMENT CONTROL BMP'S AS NEEDED TO PROTECT ALL EXPOSED PORTIONS OF THE SITE WITHIN 48 HOURS OF A PREDICTED STORM EVENT (A PREDICTED STORM EVENT IS DEFINED AS A NATIONAL WEATHER SERVICE FORECASTED 50% CHANCE OF RAIN).
5. EROSION CONTROL DEVICES SHALL NOT BE MOVED OR MODIFIED WITHOUT THE APPROVAL OF THE CITY ENGINEER.
6. ALL REMOVABLE PROTECTIVE EROSION CONTROL DEVICES SHOWN SHALL BE IN PLACE AT THE END OF EACH WORKING DAY.
7. AFTER A RAINSTORM, ALL SILT AND DEBRIS SHALL BE REMOVED FROM CHECK BERMS, SILT FENCES, AND DESILTING BASINS, ETC.
8. GRADED AREAS AROUND THE TRACT PERIMETER MUST DRAIN AWAY FROM THE FACE OF SLOPE AT THE CONCLUSION OF EACH WORKING DAY.
9. THE CONTRACTOR SHALL BE RESPONSIBLE AND SHALL TAKE NECESSARY PRECAUTIONS TO PREVENT PUBLIC TRESPASS ONTO AREAS WHERE IMPOUNDED WATER CREATES A HAZARDOUS CONDITION.
10. DESILTING BASINS ARE TO BE CONSTRUCTED AS GRADING OF INDIVIDUAL GRADING AREAS ARE COMPLETE PER ROUGH GRADING PLANS.
11. THE CITY ENGINEER RESERVES THE RIGHT TO MAKE CHANGES OR MODIFICATIONS TO THIS PLAN AS DEEMED NECESSARY.
12. INFORMATION ON THIS PLAN IS FOR EROSION CONTROL ONLY. ALL OTHER INFORMATION IS SUBJECT TO CHANGE.
13. TEMPORARY EROSION PROTECTION IS REQUIRED FOR MANUFACTURED SLOPES PRIOR TO PERMANENT PLANTING.
14. AREAS SHALL BE MAINTAINED IN SUCH A STATE THAT FIRE ACCESS SHALL BE MAINTAINED AT ALL TIMES (INCLUDING ACCESS TO NEIGHBORING PROPERTIES).
15. NO OBSTRUCTION OR DISTURBANCE OF NATURAL DRAINAGE COURSES OR EXISTING STORM DRAIN INLETS SHALL OCCUR DURING THE "WET SEASON". UNLESS ADEQUATE TEMPORARY/ PERMANENT DRAINAGE FACILITIES HAVE BEEN APPROVED AND INSTALLED TO CARRY SURFACE WATER TO THE NEAREST PRACTICAL STREET, STORM DRAIN OR NATURAL WATER COURSE.
16. THE CONTRACTOR SHALL CONDUCT HIS OPERATIONS IN SUCH A MANNER THAT STORM RUNOFF WILL BE CONTAINED WITHIN THE PROJECT OR CHANNELLED INTO THE STORM DRAIN SYSTEM WHICH SERVES THE RUNOFF AREA. STORM RUNOFF FROM ONE AREA SHALL NOT BE ALLOWED TO DIVERT TO ANOTHER RUNOFF AREA.
17. CONFORMANCE WITH THE REQUIREMENTS OF THESE PLANS SHALL IN NO WAY RELIEVE THE CONTRACTOR FROM HIS RESPONSIBILITIES TO THIS SITE AND ADJACENT PROPERTIES. TEMPORARY EROSION CONTROL SHALL CONSIST OF, BUT NOT BE LIMITED TO, CONSTRUCTING SUCH FACILITIES AND TAKING SUCH MEASURES AS ARE NECESSARY TO PREVENT, CONTROL AND ABATE WATER, MUD AND EROSION DAMAGE TO PUBLIC AND PRIVATE PROPERTY AS A RESULT OF THE CONSTRUCTION OF THIS PROJECT.
18. SLOPES CONSTRUCTED PRIOR TO OCTOBER 1 SHALL BE TREATED FOR EROSION CONTROL PRIOR TO OCTOBER 15. SLOPES CONSTRUCTED AFTER OCTOBER 1 SHALL BE TREATED FOR EROSION CONTROL AS THE CONSTRUCTION OF SLOPE PROGRESSES IN INCREMENTS OF 25 FEET OR LESS MEASURED VERTICALLY.
19. FILL AREAS WHILE BEING BROUGHT UP TO GRADE AND DURING PERIODS OF COMPLETION PRIOR TO FINAL GRADE, SHALL BE PROTECTED BY VARIOUS MEASURES TO ELIMINATE EROSION AND THE SILTATION OF DOWNSTREAM FACILITIES AND ADJACENT AREAS. THESE MEASURES MAY INCLUDE, BUT SHALL NOT BE LIMITED TO: TEMPORARY DOWNDRAINS, EITHER IN THE FORM OF PIPES OR PAVED DITCHES WITH PROTECTED OUTFALL AREAS; GRADED BERMS AROUND AREAS TO ELIMINATE EROSION OF FILL SLOPES BY SURFACE RUNOFF; CONFINED PONDING AREAS TO DESILT RUNOFF; TEMPORARY CHECK DAMS IN TOE OF SLOPE DITCHES TO DESILT RUNOFF; PROTECTION SUCH AS SAND BAGS AROUND INLETS WHICH HAVE NOT BEEN BROUGHT UP TO GRADE; AND EARTH BERMS AND APPROPRIATE GRADING TO DIRECT DRAINAGE AWAY FROM THE EDGE OF THE TOP OF SLOPES SHALL BE CONSTRUCTED AND MAINTAINED ON THOSE FILL AREAS WHERE EARTH-WORK OPERATIONS ARE NOT IN PROGRESS.
20. TOP OF CUT BROW DITCHES, WHERE REQUIRED ON THE PLANS, SHALL BE CONSTRUCTED PRIOR TO EXCEEDING 12 FEET OF CUT MEASURED VERTICALLY.
21. CLEARING AND GRUBBING SHOULD BE LIMITED TO AREAS THAT WILL RECEIVE IMMEDIATE GRADING. EROSION CONTROL MEASURES WILL BE REQUIRED TO PROTECT AREAS THAT HAVE BEEN CLEARED AND GRUBBED PRIOR TO GRADING OPERATION, AND THAT ARE SUBJECT TO RUNOFF DURING THE PERIOD FROM THE BEGINNING OF THE "WET SEASON". THESE MEASURES MAY INCLUDE BUT SHALL NOT BE LIMITED TO: GRADED DITCHES; BRUSH BARRIERS AND SILT FENCES. CARE SHALL BE EXERCISED TO PRESERVE VEGETATION BEYOND THE LIMITS OF GRADING.

EXISTING UNDERGROUND STRUCTURES:

THE EXISTENCE AND LOCATION OF ANY UNDERGROUND UTILITY PIPES OR STRUCTURES OR CONDUITS SHOWN ON THESE PLANS WERE OBTAINED BY A SEARCH OF AVAILABLE RECORDS, TO THE BEST OF THE CIVIL ENGINEER'S KNOWLEDGE THERE ARE NO EXISTING UTILITIES EXCEPT AS SHOWN ON THESE PLANS. THE CONTRACTOR IS REQUIRED TO TAKE DUE PRECAUTIONARY MEASURES TO PROTECT THE UTILITY LINES SHOWN AND ANY OTHER LINES NOT OF RECORD OR NOT SHOWN ON THESE PLANS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO NOTIFY THE OWNERS OF THE UTILITIES OR STRUCTURES CONCERNED BEFORE STARTING WORK. CONTRACTOR FURTHER ASSUMES ALL LIABILITY AND RESPONSIBILITY FOR THE UNDERGROUND UTILITY PIPES, CONDUITS OR STRUCTURES SHOWN OR NOT SHOWN ON THESE PLANS.

** CONTRACTOR TO VERIFY INVERT & EXACT LOCATION OF EXISTING UTILITIES.

PRECISE GRADING & DRAINAGE PLAN
FOR EMERGENCY HOMELESS SHELTER
17631 CAMERON LANE
CITY OF HUNTINGTON BEACH

TRAFFIC CONTROL NOTES:

1. ALL TRAFFIC CONTROL WORK FOR CONSTRUCTION SHALL CONFORM TO PART 6 OF THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (2014 EDITION), THE WORK AREA TRAFFIC CONTROL HANDBOOK (WATCH 2019) AND THESE PLANS.
2. ALL PLANS AND TRAFFIC CONTROL DEVICES SHALL CONFORM TO THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (2014 EDITION).
3. NOTHING IN THESE NOTES OR PLANS SHALL RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY FOR JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THE PROJECT, INCLUDING SAFETY OF ALL PERSONS AND PROPERTY, AND THAT THIS REQUIREMENT SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO WORKING HOURS.
4. THE ENGINEER SHALL BE DEFINED AS THE CITY OF HUNTINGTON BEACH TRAFFIC ENGINEER OR HIS/HER REPRESENTATIVE.
5. THE ENGINEER SHALL HAVE THE RIGHT TO DEMAND THE INSTALLATION OF ADDITIONAL TRAFFIC CONTROL DEVICES OR MODIFICATIONS TO THESE PLANS AND NOTES AS HE/SHE DEEMS NECESSARY TO PROMOTE THE SAFE AND ORDERLY FLOW OF TRAFFIC AND PEDESTRIANS THROUGH THE CONSTRUCTION WORK ZONE. THE CONTRACTOR SHALL COMPLY WITH THESE ADDITIONAL REQUESTS OR MODIFICATIONS WITH DUE DILIGENCE.
6. CONSTRUCTION ACTIVITY IN THE ROADWAY WILL BE LIMITED TO THE HOURS BETWEEN 9 AM AND 4 PM. ALL TRENCH EXCAVATIONS WITHIN THE ROADWAY SHALL BE COVERED WITH STEEL PLATES OR TEMPORARILY BACKFILLED AND SURFACED FROM 4 PM TO 9 PM UNLESS PRIOR WRITTEN APPROVAL IS OBTAINED FROM THE ENGINEER.
7. NO TEMPORARY CONSTRUCTION TRAFFIC CONTROL DEVICES SHALL BE PLACED IN THE ROADWAY (TO EXECUTE THE DAY'S CONSTRUCTION WORK) UNTIL AFTER 9AM AND ALL TEMPORARY CONSTRUCTION TRAFFIC CONTROL DEVICES SHALL BE COMPLETELY REMOVED BY 4 PM, UNLESS PRIOR WRITTEN APPROVAL IS OBTAINED FROM THE ENGINEER. DELINEATORS SHALL GENERALLY BE PLACED ON EXISTING LANE LINES, EXCEPT WHEN PLACED FOR LANE CLOSURE TAPERS.
8. ALL EXISTING TRAFFIC CONTROL SIGNS AND STREETS SHALL BE MAINTAINED IN VISIBLE LOCATIONS DURING CONSTRUCTION UNLESS PRIOR WRITTEN APPROVAL IS OBTAINED FROM THE ENGINEER. THE CONTRACTOR SHALL RESTORE OR REPLACE (AT THE DISCRETION OF THE ENGINEER) ANY STRIPING OR SIGNING DAMAGED DURING CONSTRUCTION OPERATIONS, INCLUDING RAISED PAVEMENT MARKERS.
9. WHEN ENTERING OR LEAVING ROADWAYS CARRYING PUBLIC TRAFFIC, THE CONTRACTORS EQUIPMENT, WHETHER EMPTY OR LOADED SHALL IN ALL CASES YIELD TO PUBLIC TRAFFIC.
10. ACCESS TO DRIVEWAYS ADJACENT TO THE CONSTRUCTION WORK ZONE SHALL BE MAINTAINED AT ALL TIMES IF AT ALL POSSIBLE. ADDITIONAL CONES OR DELINEATORS MAY BE REQUIRED TO DELINEATE THE DRIVEWAY ACCESS ROUTE THROUGH THE CONSTRUCTION WORK ZONE. A MINIMUM OF ONE TRAVEL LANE SHALL BE MAINTAINED ACROSS THE DRIVEWAY, UNLESS PRIOR WRITTEN APPROVAL IS OBTAINED FROM THE ENGINEER.
11. 48 HOURS PRIOR TO COMMENCING ANY WORK WITHIN THE IMMEDIATE VICINITY OF A TRAFFIC SIGNAL CONTROLLED INTERSECTION, THE CONTRACTOR SHALL CONTACT UNDERGROUND SERVICE ALERT (800-422-4133). THIS PRIOR NOTICE WILL ALLOW THE LOCATION AND MARKING OF UNDERGROUND TRAFFIC CONDUIT AND TRAFFIC SIGNAL CONDUIT, CONDUCTORS, LOOP DETECTORS, OR OTHER TRAFFIC SIGNAL EQUIPMENT SHALL BE REPAIRED WITHIN 24 HOURS OF THE CONTRACTOR'S EXPENSE. PER THE CITY OF HUNTINGTON BEACH STANDARD SPECIAL PROVISIONS FOR THE CONSTRUCTION OF TRAFFIC SIGNALS AND STREET LIGHTING, LATEST EDITION.
12. SPILLAGE RESULTING FROM HAULING OPERATION ALONG OR ACROSS ANY PUBLIC TRAVELED WAY SHALL BE REMOVED IMMEDIATELY BY THE CONTRACTOR AT THIS EXPENSE. STREETS ALONG THE HAUL ROUTE SHALL BE SWEEPED OR WASHED DAILY DURING EACH DAY OF HAULING OPERATION.
13. THE CONTRACTOR SHALL SUBMIT AN APPLICATION FOR TEMPORARY PARKING RESTRICTIONS AT A COST OF \$30.00. TEMPORARY NO PARKING SIGNS SHALL BE PURCHASED FROM THE CITY OF HUNTINGTON BEACH AT A COST OF \$0.75 AND BE POSTED AT LEAST 24 HOURS PRIOR TO THE ENFORCEMENT OF THE PARKING RESTRICTIONS.

SPECIAL NOTE TO OWNER AND CONTRACTOR:

1. CONSTRUCTION CONTRACTOR AGREES THAT IN ACCORDANCE WITH GENERALLY ACCEPTED CONSTRUCTION PRACTICES, CONSTRUCTION CONTRACTOR WILL BE REQUIRED TO ASSUME SOLE AND COMPLETE RESPONSIBILITY FOR THE JOB SITE CONDITIONS DURING THE COURSE OF CONSTRUCTION OF THE PROJECT, INCLUDING THE SAFETY OF ALL PERSONS AND PROPERTY; THAT THIS REQUIREMENT SHALL BE MADE TO APPLY CONTINUOUSLY, AND NOT BE LIMITED TO NORMAL WORKING HOURS AND CONSTRUCTION CONTRACTOR FURTHER AGREES TO DEFEND, INDEMNIFY AND HOLD DESIGN PROFESSIONALS HARMLESS FROM ANY AND ALL LIABILITY, REAL OR ALLEGED IN CONNECTION WITH THE PERFORMANCE OF WORK ON PROJECT.
2. ALL EXISTING TOPOGRAPHY SHOULD BE FIELD VERIFIED.
3. EARTHWORK AND OTHER CONSTRUCTION ITEM QUANTITIES ARE ESTIMATES FOR AGENCY SUBMITTAL OF THIS PLAN AND ARE NOT TO BE USED FOR CONSTRUCTION COST ESTIMATES OR FOR BIDDING PURPOSES. CONTRACTORS TO DEVELOP OWN QUANTITIES FOR BIDDING PURPOSES.
4. CITY ACCEPTANCE OF PLANS DOES NOT RELIEVE THE DEVELOPER FROM RESPONSIBILITY FOR THE CORRECTION OF ERROR AND OMISSION DISCOVERED DURING CONSTRUCTION. UPON REQUEST OF THE CITY ENGINEERING INSPECTOR, THE REQUIRED PLAN REVISIONS SHALL BE PROMPTLY SUBMITTED TO THE CITY ENGINEER FOR REVIEW.

OWNER

CITY OF HUNTINGTON BEACH
2000 MAIN STREET
HUNTINGTON BEACH, CA 92648
(714) 536-5511

CIVIL ENGINEER:

MICHAEL BAKER INTERNATIONAL
5 HUTTON CENTRE DRIVE, SUITE 500
SANTA ANA, CA 92707
MAURICIO M. IACUCELLI P.E.
(949) 472-3472

SOIL ENGINEER

AESCO
17782 GEORGETOWN LANE
HUNTINGTON BEACH, CA 92647
(714) 375-3830
REPORT: GEOTECHNICAL REPORT
TEMPORARY SHELTER FACILITY
17631 CAMERON LANE
HUNTINGTON BEACH, CA
AESCO PROJ NO. 20200305-F7053

BASIS OF BEARINGS

THE BEARINGS SHOWN HEREON ARE BASED ON THE BEARING BETWEEN OCS HORIZONTAL CONTROL STATION GPS NO. 5084R2 AND STATION GPS NO. 5085 BEING NORTH 89°30'35" WEST PER RECORDS ON FILE IN THE OFFICE OF THE ORANGE COUNTY SURVEYOR.

BASIS OF ELEVATIONS

ELEVATIONS AS SHOWN HEREON ARE IN TERMS OF CALIFORNIA ORTHOMETRIC HEIGHTS OF 1998 (COH88) AND BASED LOCALLY UPON THE FOLLOWING BENCHMARKS/CONTROL STATIONS AS PUBLISHED BY THE ORANGE COUNTY SURVEYOR (OCS). OCS LEVELED ELEVATIONS AND GEOID 2012B WERE USED TO DERIVE ORTHOMETRIC HEIGHTS FOR PROJECT.

NAME	DESCRIPTION	ELEVATION (ftus)	YEAR LEVELED
SACY	OCS REFERENCE STATION	80.650	2010
TRAK	OCS REFERENCE STATION	495.307	1993

WATER NOTES:

1. ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE TO THE LATEST CITY OF HUNTINGTON BEACH WATER STANDARDS.
2. THE CITY OF HUNTINGTON BEACH PUBLIC WORKS WATER INSPECTOR MUST BE NOTIFIED 48 HOURS BEFORE START OF WORK AT (714) 536-5431.
3. DEVELOPER IS RESPONSIBLE TO COORDINATE WITH CITY OF HUNTINGTON BEACH DEPARTMENT OF BUILDING AND SAFETY FOR THE SIZE OF WATER METER(S) AND/OR SERVICE LATERAL(S) REQUIRED. METER AND SERVICE LATERAL(S) SIZES SHOWN ON THIS PLAN WILL REQUIRE CITY BUILDING AND/OR FIRE DEPARTMENT APPROVAL. DEVELOPER IS RESPONSIBLE FOR COST OF REPLACING UNDERSIZED LATERALS & METERS DUE TO INCORRECT FIXTURE UNIT COUNTS, GALLON PER MINUTE CALCULATIONS, OR LACK OF COORDINATION WITH CITY OF HUNTINGTON BEACH DEPARTMENT OF BUILDING AND SAFETY.
4. ALL UNDERGROUND PIPING BETWEEN THE METER AND BACKFLOW PROTECTION DEVICES SHALL BE SLEEVED AND BACKFILLED WITH 2-SACK SLURRY TO 12-INCHES BELOW FINISHED GRADE.
5. SCREENING OF BACKFLOW PROTECTION DEVICE SHALL BE APPROVED BY THE CITY PUBLIC WORKS DEPARTMENT AND PLANNING DEPARTMENT.
6. CONTRACTOR SHALL NOT TAP EXISTING MAINS WITHOUT A CERTIFIED WATER INSPECTOR PRESENT. PRESSURE TEST TAPPING SLEEVE IN CERTIFIED WATER INSPECTOR'S PRESENCE BEFORE TAPPING EXISTING MAIN.
7. CITY OF HUNTINGTON BEACH WORK PRIOR TO ACCEPTANCE WILL BE LIMITED TO PLAN REVIEW AND CONSTRUCTION INSPECTION. ANY ADDITIONAL WORK BY THE CITY FORCES DEEMED NECESSARY BY CERTIFIED WATER INSPECTORS TO ENSURE COMPLIANCE WITH CITY STANDARDS WILL BE BACK CHARGED TO THE DEVELOPER OR CONTRACTOR. FINAL ACCEPTANCE WILL NOT OCCUR UNTIL REIMBURSEMENT IS RECEIVED.

NOTE: ANY WATER SERVICE WITH A FIXTURE EXCEEDING 20 FEET ABOVE THE TOP OF LOWEST CURB ELEVATION SHALL HAVE NEW WATER METER ELEVATION CERTIFICATION.

THE ENGINEER OF RECORD OR A LICENSED SURVEYOR SHALL STAKE THE LOCATION AND THE FINISH ELEVATION OF THE NEW WATER METER. PER WATER DIVISION STANDARDS, THE METER SHALL BE LOCATED 7 INCHES FROM THE TOP OF FINISH SURFACE TO THE CENTERLINE/FLOW LINE OF THE METER. PRIOR TO THE ALLEY PAVING, THE OWNER/DEVELOPER SHALL PROVIDE AN APPROVED WRITTEN CERTIFICATION TO THE PUBLIC WORKS INSPECTOR AND WATER INSPECTOR CERTIFYING THAT THE ELEVATION OF THE NEW WATER METER COMPLIES WITH THE SURVEY DATA.

EARTHWORK SUMMARY		
CATEGORY	CUT	FILL
RAW	1560	475

*EXPORT = 1085 CY


NOTE: CONTRACTOR TO VERIFY VOLUMES PRIOR TO EXCAVATION

NOTE:

1. ANY SOIL EXCAVATION AND/OR SOIL REMOVAL FOR PAVEMENT SECTIONS OR UNDERGROUND UTILITY INSTALLATION SHALL BE COMPLETED BY 40-HR HAZWOPER TRAINED WORKERS. ALL SOILS RESULTING FROM THESE EXCAVATIONS SHALL BE HAULED OFF-SITE AND DISPOSED OF IN ACCORDANCE WITH ALL LOCAL, STATE AND FEDERAL RULES AND REGULATIONS.
2. UNDERGROUND UTILITY EXCAVATION SHALL EXTEND 2-FEET BELOW AND 2-FEET ON EITHER SIDE OF PIPE. ALL SOILS RESULTING FROM THESE EXCAVATIONS SHALL BE HAULED OFF-SITE AND DISPOSED OF IN ACCORDANCE WITH ALL LOCAL, STATE AND FEDERAL RULES AND REGULATIONS.

LEGAL DESCRIPTION:

LOT 6 AND LOT 7 OF TRACT NO. 405, IN THE CITY OF HUNTINGTON BEACH, COUNTY OF ORANGE, STATE OF CALIFORNIA, AS PER MAP RECORDED IN BOOK 16, PAGE 31, OF MISCELLANEOUS MAPS, IN THE OFFICE OF THE COUNTY RECORDER OF SAID COUNTY.

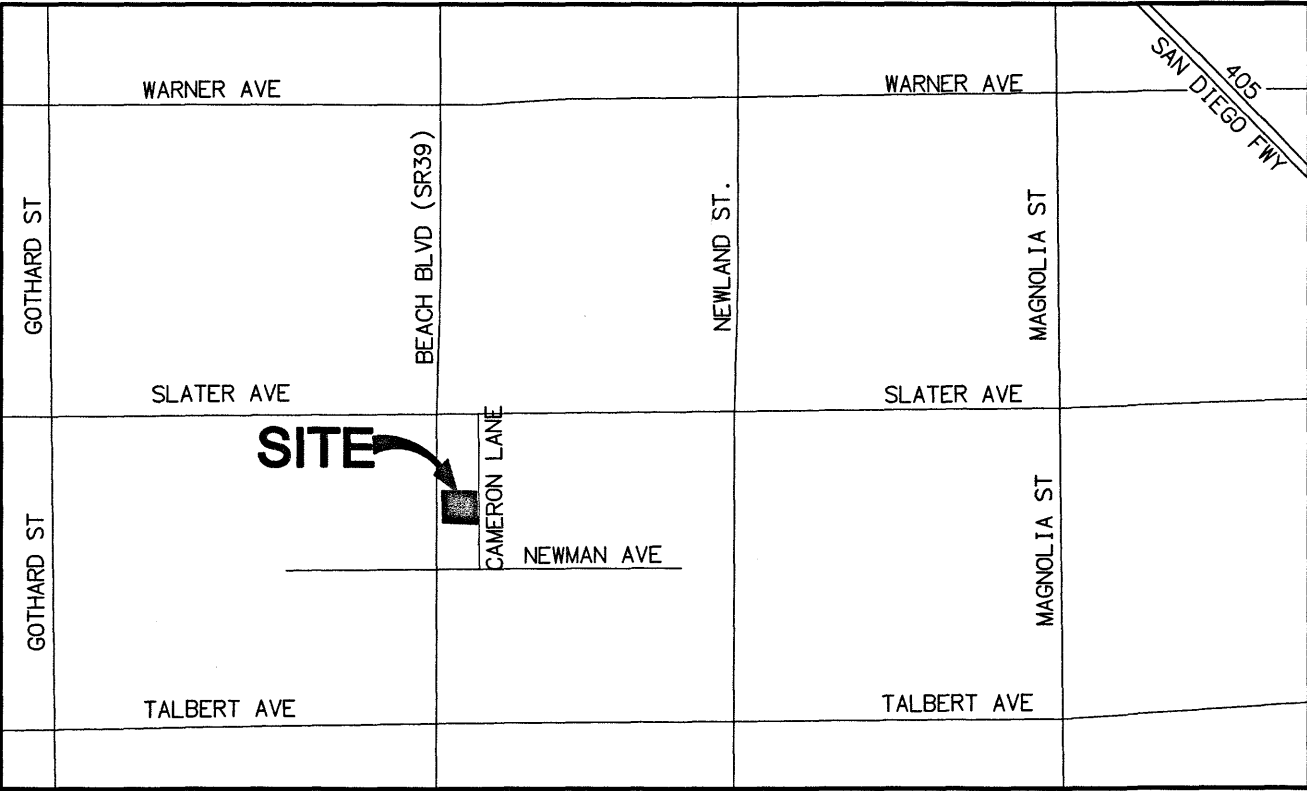

VICINITY MAP
NOT TO SCALE

ABBREVIATION	
CL	CENTERLINE
ESMT	EASEMENT
EG	EXISTING GRADE
EOHL	ELECTRICAL OVERHEAD LINE
EW	EXTRACTION WELL
FG	FINISH GRADE
FL	FLOW LINE
FS	FINISH SURFACE
GB	GRADE BREAK
INV	INVERT
MW	MONITORING WELL
MCP	MOTOR CONTROL PANEL
PB	PULLBOX
PL	PROPERTY/LOT LINE
R	RIDGE
R/W	RIGHT OF WAY
SD	STORM DRAIN
TOHL	TELECOMMUNICATION OVERHEAD LINE
TR	TOP OF RISER
TS	TOP OF SLOPE
TYP	TYPICAL
WT	WATERTIGHT

LEGEND	
---	PROPOSED RIGHT-OF-WAY LINE
- - -	EXISTING RIGHT-OF-WAY LINE
---	PROPOSED STREET CENTERLINE
- - - - -	EASEMENT
- - - - -	EXISTING CURB & GUTTER
---	PROPERTY LINE
---	BLOCK WALL
---	TOP OF SLOPE
---	TOE OF SLOPE
---	GRADING LIMITS
---	PROPOSED CHAIN LINK FENCE
---	PROPOSED WROUGHT IRON FENCE
---	BACKFLOW PREVENTOR
---	BOLLARD PROTECTION
---	PROPOSED TELE CO PEDESTAL
---	PROPOSED ELEC PEDESTAL
---	PROPOSED GAS METER
---	PROPOSED LANDSCAPE AREA
---	PROPOSED SIDEWALK
---	PROPOSED RV HOSE BIB
---	EXISTING DOMESTIC WATER
---	EXISTING RECLAIMED WATER
---	EXISTING SANITARY SEWER
---	EXISTING GAS
---	EXISTING TELECOMMUNICATION
---	EXISTING OVERHEAD ELECTRIC
---	EXISTING STORM DRAIN
---	EXISTING CATCH BASIN
---	EXISTING MANHOLE
---	EXISTING FIRE HYDRANT
---	EXISTING VALVE
---	FIRE RISER PER SEPARATE PLAN
---	EXISTING WATER METER
---	EXISTING STREET LIGHT
---	EXISTING SPOT ELEV
---	EXISTING CHAIN LINK FENCE
---	EXISTING BLOCK WALL
---	EXISTING AC PAVEMENT
---	EXISTING PULLBOX
---	IMPROVEMENT STATIONING

SHEET INDEX


NO.	SHEET TITLE
1	TITLE SHEET
2	SECTIONS AND QUANTITIES
3-4	PRECISE GRADING PLAN
5	WATER POLLUTION CONTROL PLAN
6-7	STANDARD DETAILS
8	DRAINAGE DETAILS



BLDG. PMT # TBD PW# 20-020 L# 20-128

PRECISE GRADING PLAN
EMERGENCY HOMELESS SHELTER

TITLE SHEET
17631 CAMERON LANE
IN THE CITY OF HUNTINGTON BEACH

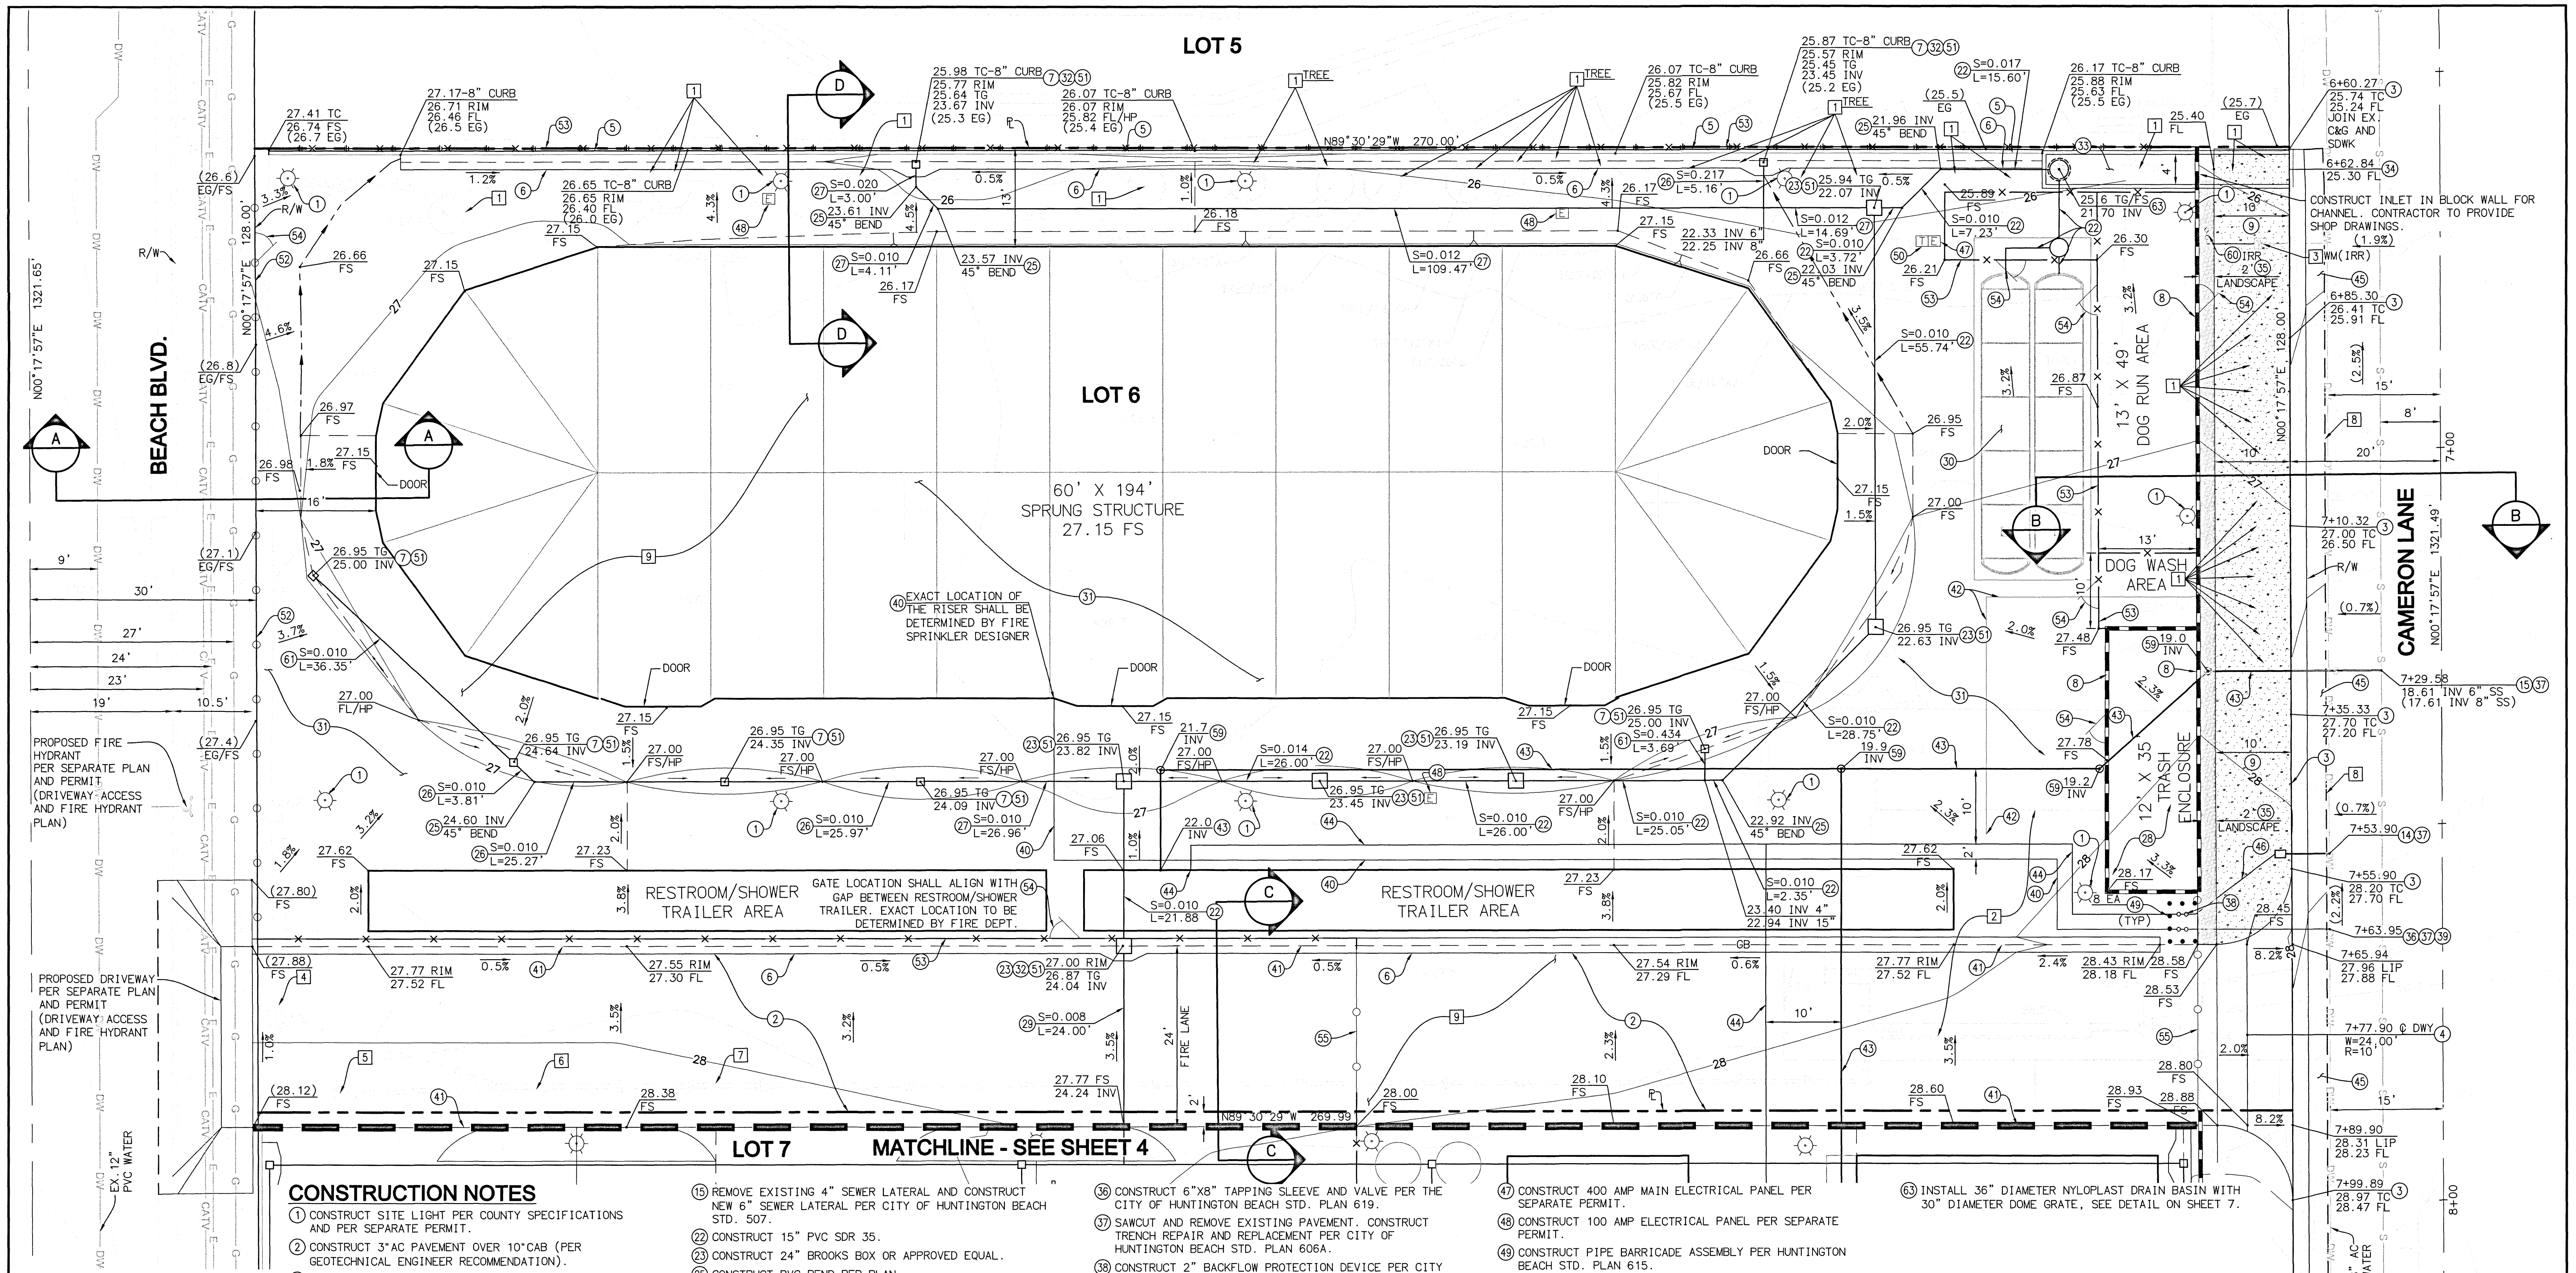

CONSTRUCTION NOTES

1. CONSTRUCT SITE LIGHT PER COUNTY SPECIFICATIONS AND PER SEPARATE PERMIT.
2. CONSTRUCT 3" AC PAVEMENT OVER 10" C&G (PER GEOTECHNICAL ENGINEER RECOMMENDATION).
3. CONSTRUCT 6" CURB AND GUTTER PER CITY OF HUNTINGTON BEACH STD. 202.
4. CONSTRUCT COMMERCIAL DRIVEWAY APPROACH PER CITY OF HUNTINGTON BEACH STD. 211.
5. CONSTRUCT 8" CURB ONLY PER CITY OF HUNTINGTON BEACH STD. 201, TYPE B-1.
6. CONSTRUCT MODIFIED 24" GUTTER PER CITY OF HUNTINGTON BEACH STD. 218. SEE DETAIL ON SHEET 6.
7. CONSTRUCT 12" BROOKS BOX CATCH BASIN, OR APPROVED EQUAL.
8. CONSTRUCT 6" HIGH BLOCK WALL PER CITY OF HUNTINGTON BEACH DEPARTMENT OF COMMUNITY DEVELOPMENT PLAN NO. 2.
9. CONSTRUCT 4" PCC SIDEWALK PER CITY OF HUNTINGTON BEACH STD. 207.
10. CONSTRUCT 2" WATER SERVICE WITH 2" METER PER CITY OF HUNTINGTON BEACH STD. 603.

11. REMOVE EXISTING 4" SEWER LATERAL AND CONSTRUCT NEW 6" SEWER LATERAL PER CITY OF HUNTINGTON BEACH STD. 507.
12. CONSTRUCT 15" PVC SDR 35.
13. CONSTRUCT 24" BROOKS BOX OR APPROVED EQUAL.
14. CONSTRUCT PVC BEND PER PLAN.
15. CONSTRUCT 6" PVC SDR 35.
16. CONSTRUCT 8" PVC SDR 35.
17. CONSTRUCT TRASH ENCLOSURE PER CITY OF HUNTINGTON BEACH STD. PLANS AND SPECIFICATION.
18. CONSTRUCT 12" PVC SDR 35.
19. CONSTRUCT DETENTION SYSTEM PER DETAIL ON SHEET 8.
20. CONSTRUCT 2" AC PAVEMENT OVER COMPACTED SUBGRADE (PER GEOTECHNICAL ENGINEERS RECOMMENDATION).
21. CONSTRUCT BROOKS BOX TO GUTTER DETAIL ON SHEET 7.
22. CONSTRUCT 5" RECTANGULAR CONCRETE CHANNEL PER DETAIL ON SHEET 7.
23. CONSTRUCT MODIFIED PARKWAY CULVERT TYPE "B" PER CITY OF HUNTINGTON BEACH STD. 312. AND PER DETAIL ON SHEET 7.
24. CONSTRUCT DROUGHT TOLERANT LANDSCAPING AND IRRIGATION PER CITY STANDARDS.


25. CONSTRUCT 6"X8" TAPPING SLEEVE AND VALVE PER THE CITY OF HUNTINGTON BEACH STD. PLAN 619.
26. SAWCUT AND REMOVE EXISTING PAVEMENT. CONSTRUCT TRENCH REPAIR AND REPLACEMENT PER CITY OF HUNTINGTON BEACH STD. PLAN 606A.
27. CONSTRUCT 2" BACKFLOW PROTECTION DEVICE PER CITY OF HUNTINGTON BEACH STD. PLAN 609A.
28. CONSTRUCT 6" FIRE SERVICE AND DOUBLE CHECK DETECTOR ASSEMBLY (DCCA) PER CITY OF HUNTINGTON BEACH STD. PLAN 618.
29. CONSTRUCT 6" FIRE LINE PER SEPARATE HBFD PLAN AND PERMIT.
30. CONSTRUCT PAINTED RED TO SIGNIFY FIRE LANE PER CITY SPECIFICATION #415 AND DETAIL ON SHEET 2.
31. CONSTRUCT 2" GAS LINE AND METER BY OTHERS.
32. CONSTRUCT 6" PVC (SCHEDULE 40) SEWER LINE PER SEPARATE PERMIT (ALL ELEVATIONS TO BE VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION).
33. CONSTRUCT 2" PVC (SCHEDULE 40) DOMESTIC WATER LINE PER SEPARATE PERMIT (ALL ELEVATIONS TO BE VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION).
34. INSTALL PAVEMENT SECTION TO MATCH EXISTING OR AS DETERMINED BY INSPECTOR.
35. INSTALL COPPER K TUBING PER CITY OF HUNTINGTON BEACH STD. PLAN 609A.

36. CONSTRUCT 400 AMP MAIN ELECTRICAL PANEL PER SEPARATE PERMIT.
37. CONSTRUCT 100 AMP ELECTRICAL PANEL PER SEPARATE PERMIT.
38. CONSTRUCT PIPE BARRICADE ASSEMBLY PER HUNTINGTON BEACH STD. PLAN 615.
39. CONSTRUCT TELCO PEDESTAL PER SEPARATE PERMIT.
40. CONSTRUCT FLEXSTORM PURE STORM INSERTS OR APPROVED EQUAL.
41. CONSTRUCT 6' HIGH WROUGHT IRON FENCE PER SEPARATE PERMIT.
42. CONSTRUCT 6' HIGH CHAIN LINK FENCE PER SEPARATE PERMIT.
43. CONSTRUCT 4' PEDESTRIAN ACCESS GATE PER CITY SPECIFICATIONS WITH HBFD APPROVED KNOX BOX (GATE LOCATION TO BE VERIFIED PRIOR TO CONSTRUCTION).
44. CONSTRUCT 20" WIDE ELECTRIC SLIDING GATE WITH OPTICON SENSOR PER CITY SPECIFICATIONS AND INSTALL HBFD APPROVED KNOX SWITCH.
45. CONSTRUCT 6" SEWER CLEANOUT.
46. CONSTRUCT 1" RPPD BACKFLOW PROTECTION DEVICE PER CITY OF HUNTINGTON BEACH STD. PLAN 609A.
47. CONSTRUCT 4" PVC SDR 35.

48. INSTALL 36" DIAMETER NYLOPLAST DRAIN BASIN WITH 30" DIAMETER DOME GRATE, SEE DETAIL ON SHEET 7.

NOTE:

CONTRACTOR SHALL OBTAIN A BUILDING DEPARTMENT DEMOLITION PERMIT FOR ANY WORK RELATED TO THE BUILDING AND FOLLOW ALL RULES AND REGULATIONS REGARDING THE REMOVAL AND DISPOSAL OF IDENTIFIED LEAD AND ASBESTOS.

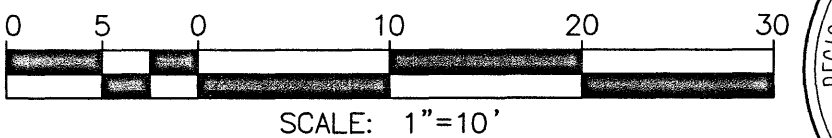

DISPOSITION NOTES

1. REMOVE EXISTING TREE STUMP AND ROOTS.
2. DEMOLISH AND REMOVE EXISTING HOUSE PER SEPARATE PERMIT.
3. PROTECT IN PLACE.
4. REMOVE EXISTING GAS METER AND BOLLARDS.
5. REMOVE EXISTING WATER METER.
6. REMOVE EXISTING WATER LINE.
7. REMOVE EXISTING GAS LINE ONCE SERVICE IS SHUT DOWN.
8. SAWCUT EXISTING PAVEMENT.
9. CLEAR AND GRUB SITE AND PERFORM SUBGRADE PREPARATION PER GEOTECHNICAL ENGINEER RECOMMENDATIONS.

Underground Service Alert

Call TOLL FREE
1-800-422-4133

TWO WORKING DAYS BEFORE YOU DIG

REVISIONS				
REV.	DATE	BY	DESCRIPTION	APP'D

REFERENCES			

PREPARED UNDER THE SUPERVISION OF:


R.C.E. NO.: 63249 EXP. DATE: 6/30/2022

REVIEWED BY:

DESIGNED BY: JM 08/20

CHECKED BY: MM 08/20

HUNTINGTON BEACH DEPT. OF PUBLIC WORKS

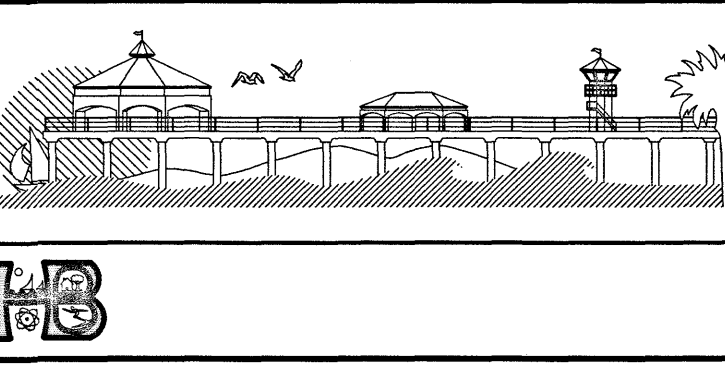

BLDG. PMT # TBD PW# 20-020 L# 20-128


PRECISE GRADING PLAN

EMERGENCY HOMELESS SHELTER

PRECISE GRADING
17631 CAMERON LANE
IN THE CITY OF HUNTINGTON BEACH

3

8

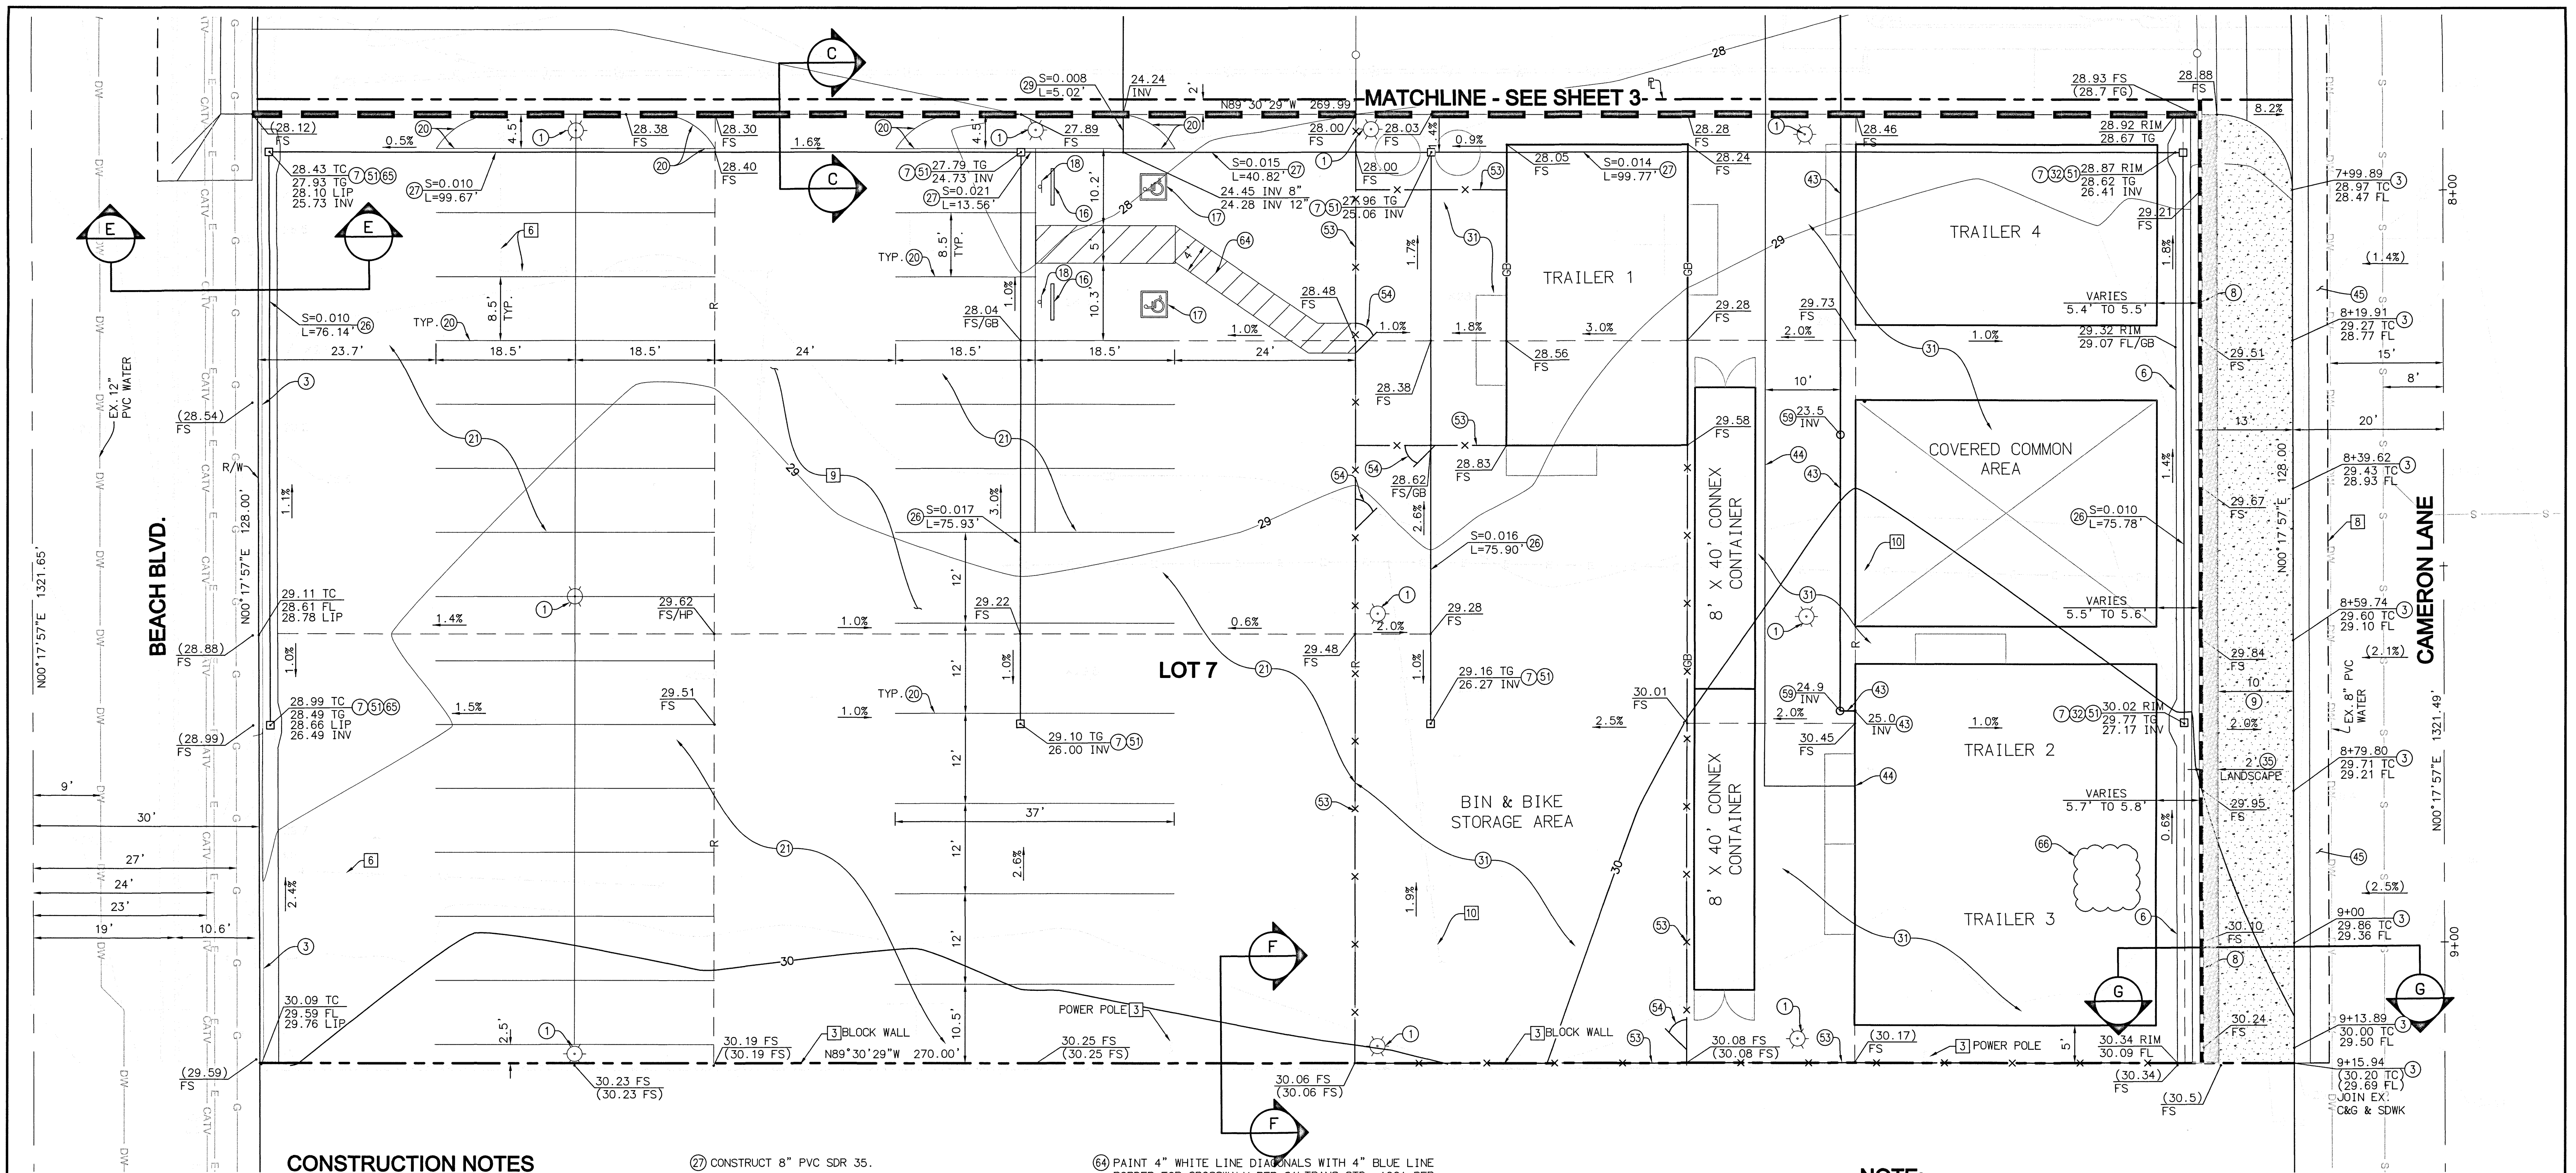

CONSTRUCTION NOTES

- (1) CONSTRUCT SITE LIGHT PER COUNTY SPECIFICATIONS AND PER SEPARATE PERMIT.
- (3) CONSTRUCT 6" CURB AND GUTTER PER CITY OF HUNTINGTON BEACH STD. 202.
- (6) CONSTRUCT MODIFIED 24" GUTTER PER CITY OF HUNTINGTON BEACH STD. 218. SEE DETAIL ON SHEET 6.
- (7) CONSTRUCT 12" BROOKS BOX CATCH BASIN, OR APPROVED EQUAL.
- (8) CONSTRUCT 6" HIGH BLOCK WALL PER CITY OF HUNTINGTON BEACH DEPARTMENT OF COMMUNITY DEVELOPMENT PLAN NO. 2.
- (9) CONSTRUCT 4" PCC SIDEWALK PER CITY OF HUNTINGTON BEACH STD. 207.
- (16) CONSTRUCT CURB STOP WITH 14" - #4 ANCHOR BARS
- (17) CONSTRUCT ACCESSIBILITY PARKING STALL PER CALTRANS STD. A90A PER SEPARATE PERMIT.
- (18) CONSTRUCT ACCESSIBILITY PARKING SIGN R99 (CA) PER SEPARATE PERMIT.
- (20) CONSTRUCT PARKING STRIPE 2 COAT WHITE PAINT 4-INCHES WIDE PER SEPARATE PERMIT.
- (21) CONSTRUCT 3" AC PAVEMENT OVER 5" CAB (PER GEOTECHNICAL ENGINEERS RECOMMENDATION).
- (26) CONSTRUCT 6" PVC SDR 35.
- (27) CONSTRUCT 8" PVC SDR 35.
- (29) CONSTRUCT 12" PVC SDR 35.
- (31) CONSTRUCT 2" AC PAVEMENT OVER COMPACTED SUBGRADE (PER GEOTECHNICAL ENGINEERS RECOMMENDATION).
- (32) CONSTRUCT BROOKS BOX TO GUTTER DETAIL ON SHEET 7.
- (36) CONSTRUCT DROUGHT TOLERANT LANDSCAPING AND IRRIGATION PER CITY STANDARDS.
- (43) CONSTRUCT 6" PVC (SCHEDULE 40) SEWER LINE PER SEPARATE PERMIT (ALL ELEVATIONS TO BE VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION).
- (44) CONSTRUCT 2" PVC (SCHEDULE 40) DOMESTIC WATER LINE PER SEPARATE PERMIT (ALL ELEVATIONS TO BE VERIFIED BY CONTRACTOR PRIOR TO CONSTRUCTION).
- (45) INSTALL PAVEMENT SECTION TO MATCH EXISTING OR AS DETERMINED BY INSPECTOR.
- (51) CONSTRUCT FLEXSTORM PURE STORM INSERTS OR APPROVED EQUAL.
- (53) CONSTRUCT 6" HIGH CHAIN LINK FENCE PER SEPARATE PERMIT.
- (54) CONSTRUCT 4" PEDESTRIAN ACCESS GATE PER CITY SPECIFICATIONS WITH H&FD APPROVED KNOX BOX (GATE LOCATION TO BE VERIFIED PRIOR TO CONSTRUCTION).
- (59) CONSTRUCT 6" SEWER CLEANOUT

- (64) PAINT 4" WHITE LINE DIAGONALS WITH 4" BLUE LINE BORDER FOR CROSSWALK PER CALTRANS STD. A90A PER SEPARATE PERMIT.
- (65) CONSTRUCT BROOKS BOX TO CURB & GUTTER DETAIL ON SHEET 7.
- (66) LOCATE ABANDONED WELL AND COORDINATE WITH ORANGE COUNTY HEALTH CARE AGENCY FOR WELL DESTRUCTION AND PERMIT REQUIREMENTS. REFER TO NOTE HEREON FOR HEALTH AGENCY CONTACT INFORMATION.

NOTE:

- 1. PER ORANGE COUNTY HEALTH CARE AGENCY (OCHCA) AND ORANGE COUNTY WATER DISTRICT RECORDS, THERE IS AN ABANDONED FORMER WATER WELL ON THIS PROPERTY WITH UNKNOWN STATUS ON DESTRUCTION. WELL LOCATION DETAILS: 400 FT NORTH OF NEWMAN AVENUE AND 25 FT WEST OF CAMERON STREET. CONTACT OCHCA REGARDING WELL DESTRUCTION REQUIREMENTS AND PERMITS AT: OCHCA WEBSITE AT OCHCA.INFO/WEBSITE/WEBSITE/WEBSITE OR OCHCA WELL PERMITTING OFFICE PHONE: (714) 433-6287.
- 2. TRAILERS 1 THROUGH 4 ARE FOR OFFICE USE AND WILL NOT BE USED FOR SLEEPING.

NOTE:

CONTRACTOR SHALL OBTAIN A BUILDING DEPARTMENT DEMOLITION PERMIT FOR ANY WORK RELATED TO THE BUILDING AND FOLLOW ALL RULES AND REGULATIONS REGARDING THE REMOVAL AND DISPOSAL OF IDENTIFIED LEAD AND ASBESTOS.

DISPOSITION NOTES

- (3) PROTECT IN PLACE.
- (8) REMOVE EXISTING WATER LINE.
- (8) SAWCUT EXISTING PAVEMENT.
- (9) CLEAR AND GRUB SITE AND PERFORM SUBGRADE PREPARATION PER GEOTECHNICAL ENGINEER RECOMMENDATIONS.
- (10) REMOVE EXISTING ELECTRICAL CONDUIT.

Underground Service Alert

Call: TOLL FREE
1-800-422-4133

TWO WORKING DAYS BEFORE YOU DIG

REVISIONS				
REV.	DATE	BY	DESCRIPTION	APP'D

REFERENCES	

PREPARED UNDER THE SUPERVISION OF:


R.C.E. NO.: 63249 EXP. DATE: 6/30/2022

REVIEWED BY:

DESIGNED BY: TM 08/20

CHECKED BY: JB 08/20

HUNTINGTON BEACH DEPT. OF PUBLIC WORKS

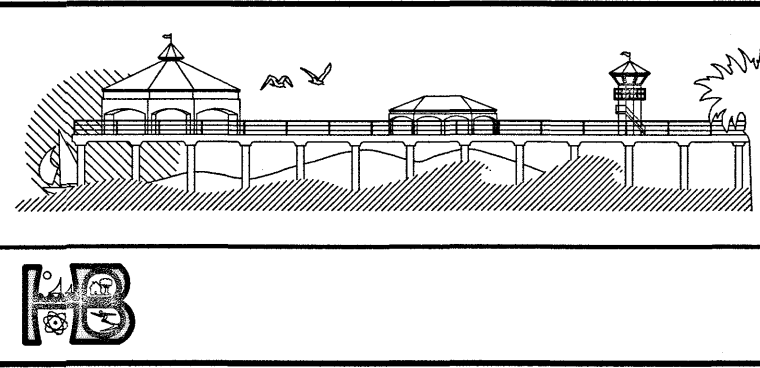

BLDG. PMT # TBD PW# 20-020 L# 20-128

PRECISE GRADING PLAN

EMERGENCY HOMELESS SHELTER


PRECISE GRADING

17631 CAMERON LANE

IN THE CITY OF HUNTINGTON BEACH

4

8

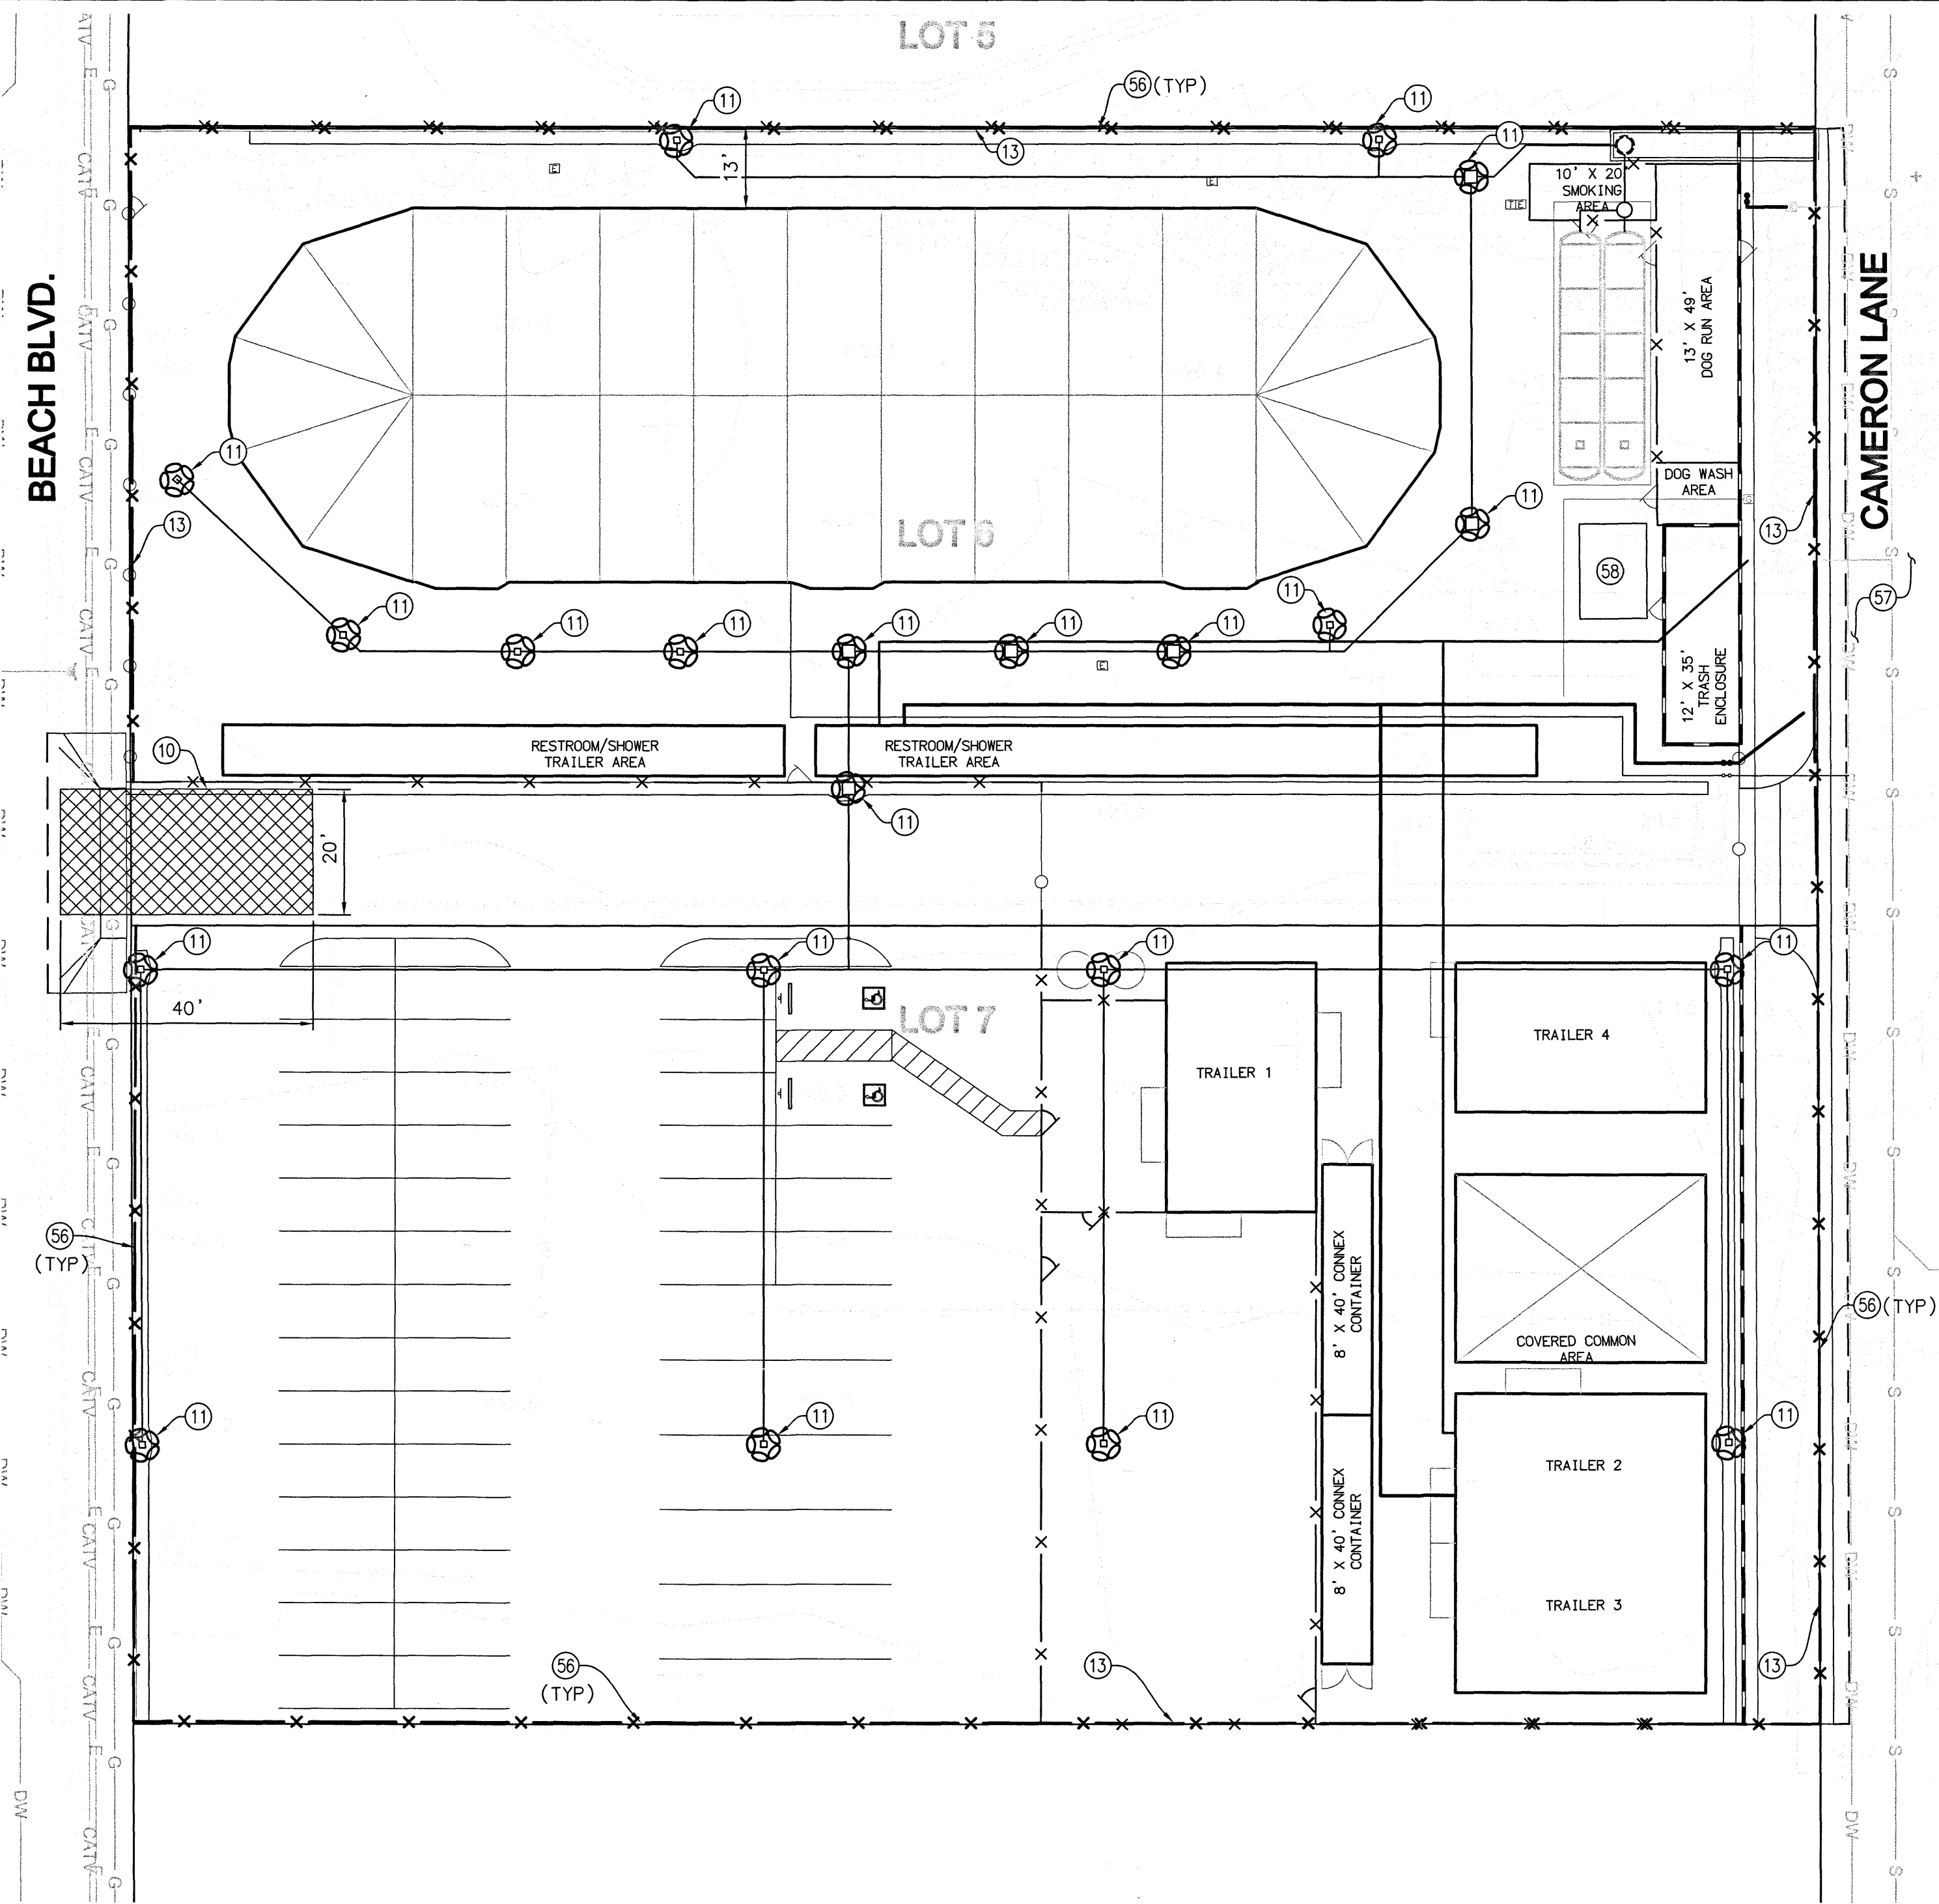


CONSTRUCTION ACTIVITY BMP LIST


CASQA CONSTRUCTION BMP HANDBOOK REFERENCE NO.	TRENCHING	UTILITY INSTALLATION	BACKFILL OPERATIONS	VERTICAL CONSTRUCTION	CONCRETE PAVING	HARDSCAPE	LANDSCAPE INSTALLATION
INSTALL/MAINTAIN SILT FENCE PER CASQA BMP SE-1	X	X	X	X	X	X	X
CONSTRUCT CHECK DAM/VELOCITY REDUCER PER CASQA BMP SE-4	X	X	X	X	X	X	X
STREET SWEEPING PER CASQA SE-7	X	X	X	X	X	X	X
CONSTRUCT STORM DRAIN INLET PROTECTION PER CASQA BMP SE-10	X	X	X	X	X	X	X
CONSTRUCT STABILIZED CONSTRUCTION ENTRANCE/EXIT PER CASQA BMP TC-1	X	X	X	X	X	X	X
SCHEDULING PER CASQA EC-1	X	X	X	X	X	X	X
WIND EROSION CONTROL PER CASQA WE-1	X	X	X	X	X	X	X
WATER CONSERVATION PRACTICES PER CASQA NS-1	X	X	X	X	X	X	X
PAVING AND GRINDING OPERATIONS PER CASQA NS-3					X	X	
CONCRETE CURING AND FINISHING PER CASQA NS-12 & NS-13		X		X	X	X	
MATERIAL DELIVERY AND STORAGE PER CASQA WM-1		X	X	X	X	X	X
STOCKPILE MANAGEMENT PER CASQA WM-3	X	X	X	X	X	X	X
SOLID WASTE MANAGEMENT PER CASQA WM-5	X	X	X	X	X	X	X
CONCRETE WASTE MANAGEMENT PER CASQA WM-8		X		X	X	X	
SANITARY/SEPTIC WASTE MANAGEMENT PER CASQA WM-9	X	X	X	X	X	X	X

CONSTRUCTION NOTES

- CONSTRUCT STABILIZED CONSTRUCTION ENTRANCE WITH RUMBLE PLATES PER CASQA BMP TC-1 AND DETAIL ON SHEET 4.
- CONSTRUCT GRATE INLET PROTECTION PER CASQA BMP SE-10 AND DETAIL ON SHEET 4.
- CONSTRUCT SILT FENCE PER CASQA BMP SE-1 AND DETAIL ON SHEET 4.
- CONSTRUCT 6' HIGH TEMPORARY CHAIN LINK FENCE WITH GREEN WIND SCREEN MESH.
- IMPLEMENT STREET SWEEPING AND VACUUMING PER CASQA BMP SE-7.
- CONSTRUCT CONCRETE WASHOUT PER CASQA BMP WM-8.

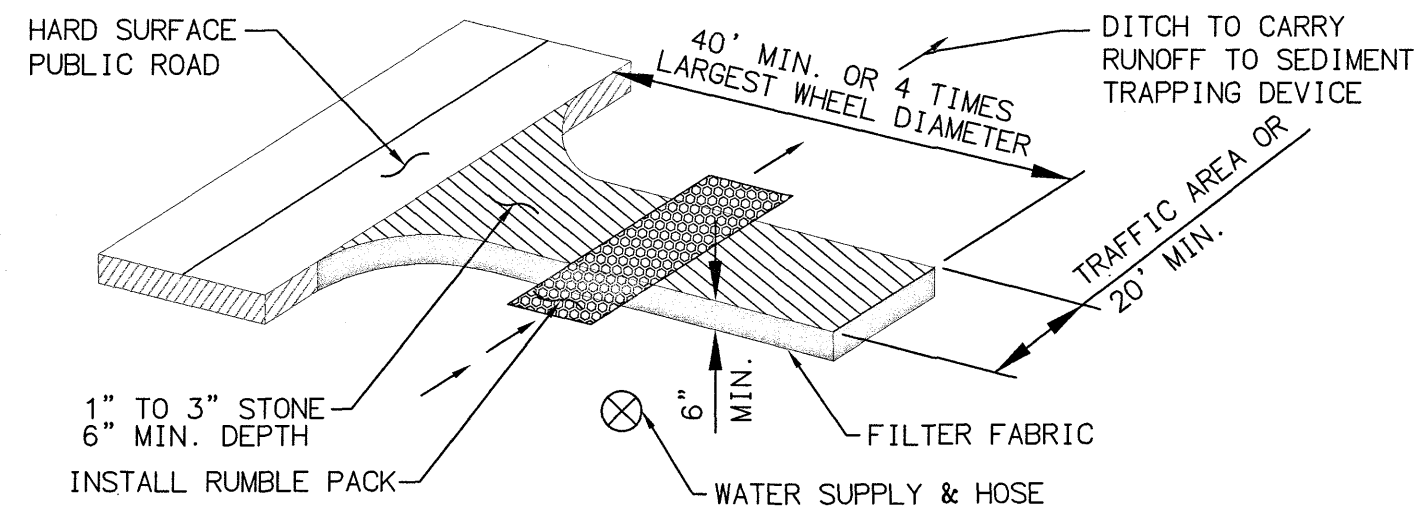

10 STABILIZED CONSTRUCTION ENTRANCE

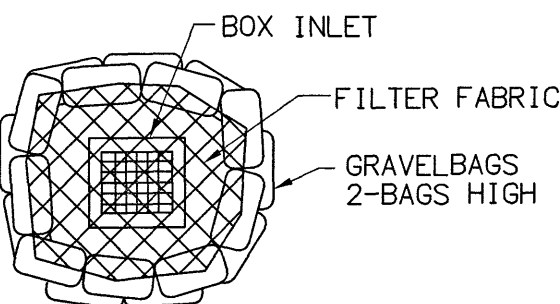

11 GRATE INLET PROTECTION (SUMP)

EROSION CONTROL NOTES:


- THE WPOP SHALL BE AVAILABLE AT THE CONSTRUCTION SITE DURING WORK HOURS WHILE CONSTRUCTION IS OCCURRING.
- BMPs AS SHOWN HEREIN, SHALL BE INSTALLED PER CALTRANS BMP MANUAL. ANY VARIATION REQUIRES APPROVAL FROM THE OSD.
- THE INFORMATION ON THESE DRAWINGS IS ACCURATE FOR EROSION AND SEDIMENT CONTROL PURPOSES ONLY. CONTRACTOR SHALL NOTIFY THE OSD IMMEDIATELY OF ANY DISCREPANCIES AND REVISIONS TO THE PLANS.
- MINOR ADJUSTMENTS TO BMP PLACEMENT AND SEQUENCE OF BMP IMPLEMENTATION ARE ANTICIPATED IN THE FIELD DURING CONSTRUCTION DUE TO CONSTRAINTS ASSOCIATED WITH CONSTRUCTION ACTIVITIES, SCHEDULING AND UNFORESEEN FIELD CONDITIONS. OSD, GSP, OR THE ASSIGNED DESIGNEE SHALL APPROVE, DOCUMENT, INITIAL, AND DATE ALL FIELD ADJUSTMENTS. THE GSP SHALL COORDINATE WITH OSD WHEN THERE ARE SIGNIFICANT CHANGES THAT WOULD NECESSITATE A FORMAL AMENDMENT. AMENDMENTS SHALL BE COMPLETE AND APPLICABLE BMPs SHALL BE IMPLEMENTED PRIOR TO CONSTRUCTION ACTIVITIES ASSOCIATED WITH SUCH AMENDMENT.
- EQUIPMENT AND LABOR FOR EMERGENCY WORK SHALL BE AVAILABLE AT ALL TIMES DURING THE RAINY SEASON. ALL NECESSARY MATERIALS SHALL BE STOCKPILED ON-SITE AT CONVENIENT LOCATIONS TO FACILITATE RAPID CONSTRUCTION OF TEMPORARY DEVICES WHEN RAIN IS IMMINENT.
- REGULATORY AGENCY INSPECTIONS MAY OCCUR WITHOUT NOTICE. ESCORT THE REGULATOR, TAKING THE SAME PHOTOGRAPHS AS THE INSPECTOR.
- UPON COMPLETION OF CONSTRUCTION ACTIVITIES, DISTURBED AREAS SHALL BE STABILIZED WITHIN 14 DAYS.
- ALL SPILLS SHALL BE REPORTED IMMEDIATELY TO THE OSD. TO THE EXTENT THAT THE WORK CAN BE ACCOMPLISHED SAFELY, SPILLS OF OIL, PETROLEUM PRODUCTS, AND SUBSTANCES LISTED UNDER 40 CFR PARTS 110, 117, AND 302, AND SANITARY AND SPECIFIC WASTE SHOULD BE CONTAINED AND CLEANED UP IMMEDIATELY. (REFER TO WM-4).
- SHOULD GROUNDWATER BE ENCOUNTERED DURING CONSTRUCTION ACTIVITIES, CONTACT THE GSP PRIOR TO DEWATERING. THE GSP WILL PROVIDE GUIDELINES FOR DISPOSAL OF GROUNDWATER.
- SHOULD CONTAMINATED SOIL BE ENCOUNTERED DURING CONSTRUCTION ACTIVITIES, CONTACT THE GSP.
- THE CONTRACTOR SHALL REMOVE ACCUMULATED SILT AND DEBRIS FROM BMPs AFTER EACH RAINFALL.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR CLEAN UP OF SEDIMENT WITHIN OR DOWNSTREAM OF THE PROJECT CAUSED BY CONSTRUCTION ACTIVITIES.
- THE CONTRACTOR SHALL INSTALL ADDITIONAL EROSION/SEDIMENT CONTROL MEASURES AS MAY BE REQUIRED BY THE OSD OR GSP DUE TO UNFORESEEN CIRCUMSTANCES OR RAIN EVENTS.
- THE CONTRACTOR SHALL RESTORE ALL EROSION/SEDIMENT CONTROL DEVICES TO WORKING ORDER TO THE SATISFACTION OF THE GSP AFTER EACH RUN-OFF PRODUCING RAINFALL.
- THE CONTRACTOR MUST COMPLY WITH ALL ENVIRONMENTAL PERMITS AND PLANS.
- ALL REMOVABLE EROSION PROTECTIVE DEVICES SHALL BE IN PLACE AT THE END OF EACH WORKING DAY WHEN THE NOAA FORECAST EXCEEDS 50%.
- HAZARDOUS WASTE MANAGEMENT AND SECONDARY CONTAINMENT SHALL BE IMPLEMENTED FOR ALL WASTEWATER AND SOILS DRUMS.
- ALL PARKED CONSTRUCTION EQUIPMENT SHALL BE PROTECTED WITH DRIP PANS AND/OR VISQUEEN TO CATCH LEAKS/SPILLS.
- CONTAINMENT TRAYS SHALL BE PLACED UNDER ALL PORTABLE SANITARY FACILITIES.
- PLACEMENT OF PORTABLE SANITARY FACILITIES, AND MATERIAL/WASTE SHALL BE AT LEAST 50 FEET FROM CONCENTRATED FLOW PATHS AND DRAINAGE FACILITIES.
- BMP MAINTENANCE SHALL BE ADDRESSED WITHIN 72 HOURS. BMP MAINTENANCE TRIGGERS, INCLUDE BUT NOT LIMITED TO 1/2 HEIGHT OF BMPs (FOR LINEAR CONTROLS), SWEEPING UPON ANY TRACK OUT, AND DAILY LITTER REMOVAL.
- GENERAL HOUSEKEEPING OF THE CONSTRUCTION SITE SHALL BE MAINTAINED.
- ALL NON-STORM WATER AND MATERIALS/WASTE MANAGEMENT BMPs TO BE IMPLEMENTED ARE DESCRIBED IN THE WPOP. THE EXACT LOCATIONS AND APPLICATIONS OF THESE BMPs SHALL BE FIELD LOCATED AND FOLLOW THE CALTRANS BMPs MANUAL.

OTHER PROJECT CONSTRUCTION ACTIVITY

CONTRACTOR OSD SHALL AMEND WPOP TO INCLUDE ANY ADDITIONAL BMPs REQUIRED TO COMPLETE PROJECT WORK IN ACCORDANCE WITH GENERAL CONSTRUCTION PERMIT AND PROJECT SPECIFICATIONS AND PLANS.


SYMBOL LEGEND

- GRAVEL BAG
- STABILIZED CONSTRUCTION ENTRANCE
- GRAVEL BAG VELOCITY REDUCER
- SILT FENCE
- STORM DRAIN INLET PROTECTION

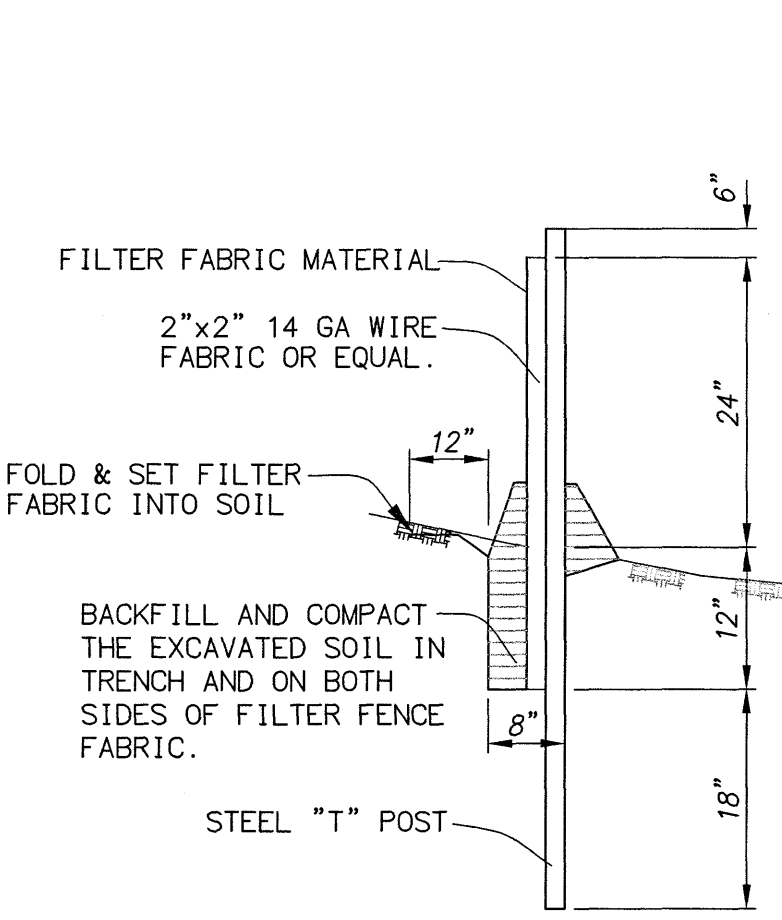

SECTION VIEW

13 SILT FENCE DETAIL

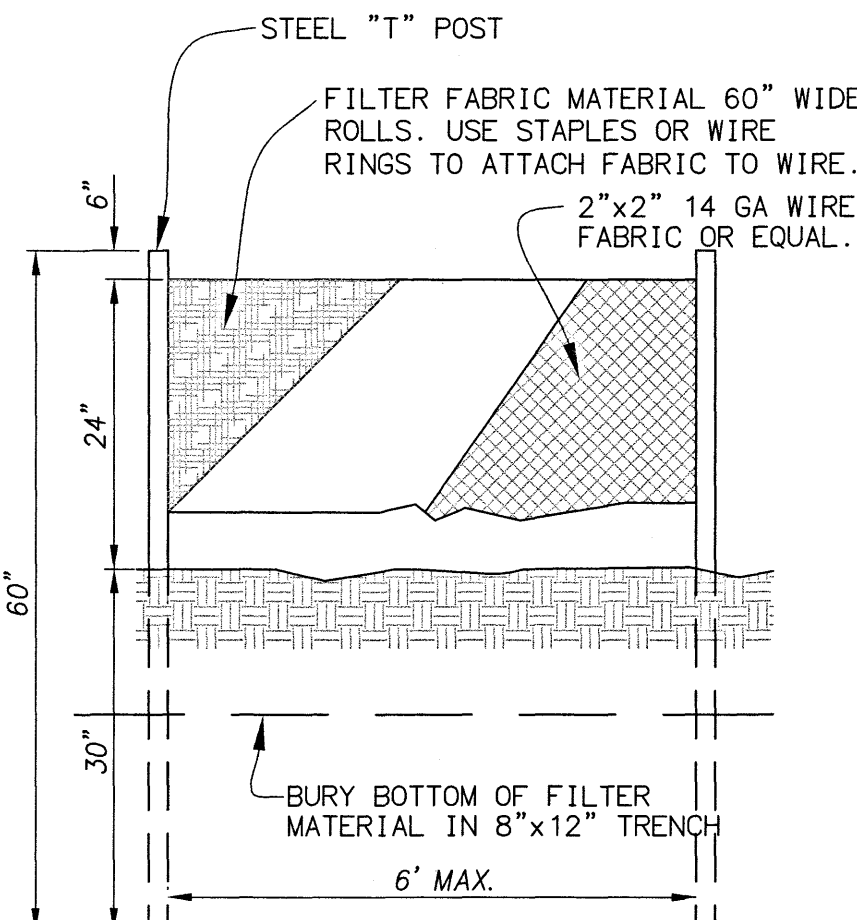

ELEVATION VIEW

BEST MANAGEMENT PRACTICES:

THE FOLLOWING BEST MANAGEMENT PRACTICES (BMP) FROM THE CALIFORNIA BMP HANDBOOK (2015 EDITION) FOR CONSTRUCTION ACTIVITIES MUST BE IMPLEMENTED AS APPLICABLE FOR ALL CONSTRUCTION ACTIVITIES. THE WPOP SHALL BE UPDATED TO REFLECT THE CURRENT GRADED CONDITIONS AND THE PLACEMENT OF ALL BMP'S.

Underground Service Alert

Call: TOLL FREE
1-800-422-4133

TWO WORKING DAYS BEFORE YOU DIG

REVISIONS


REV.	DATE	BY	DESCRIPTION	APP'D

REFERENCES

DRAWN BY:	TM	08/20
DESIGNED BY:	JB	08/20
CHECKED BY:	MMI	08/20

PREPARED UNDER THE SUPERVISION OF:

R.C.E. NO.: 63249 EXP. DATE: 6/30/2022
REVIEWED BY:
HUNTINGTON BEACH DEPT. OF PUBLIC WORKS

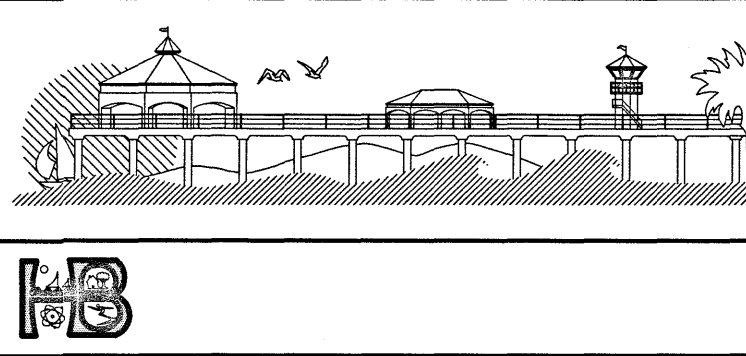

BLDG. PMT #

TBD

PW# 20-020 L# 20-128

PRECISE GRADING PLAN

EMERGENCY HOMELESS SHELTER


WATER POLLUTION CONTROL PLAN

17631 CAMERON LANE
IN THE CITY OF HUNTINGTON BEACH

5

8



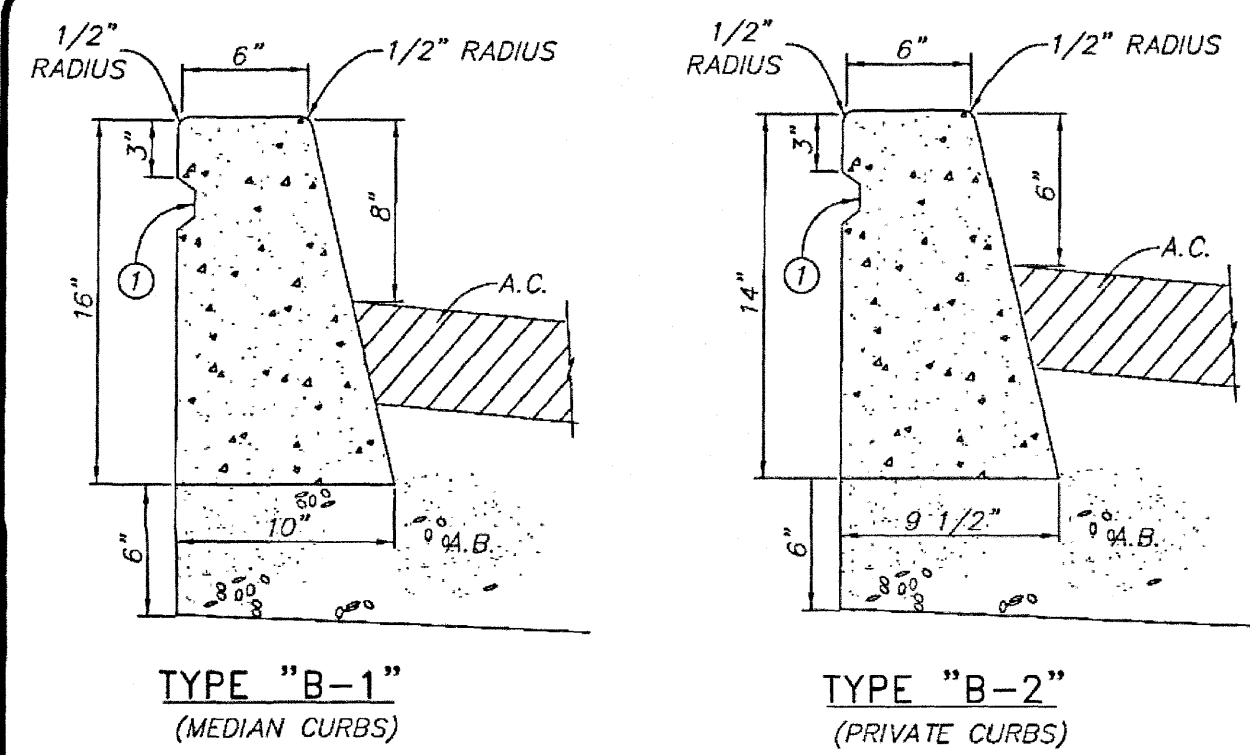

NOTES:

① CHAMFERED KEY 1" X 2" TO BE CONSTRUCTED WHEN CONCRETE SIDEWALK IS REQUIRED TO BACK OF CURB.

GENERAL NOTES:

1. PROVIDE WEAKENED PLANE JOINT AT 10' MAXIMUM SPACING AND AT DRIVE APPROACHES, B.C.'S, E.C.'S, CROSS-GUTTERS AND CATCH BASIN TRANSITIONS.

APPROVED: CITY ENGINEER


CITY OF HUNTINGTON BEACH
DEPARTMENT OF PUBLIC WORKS

CURB SECTION

REVISION DATE: May 2008

STANDARD PLAN 201
1 of 1

5 **HB STD 201**
NOT TO SCALE

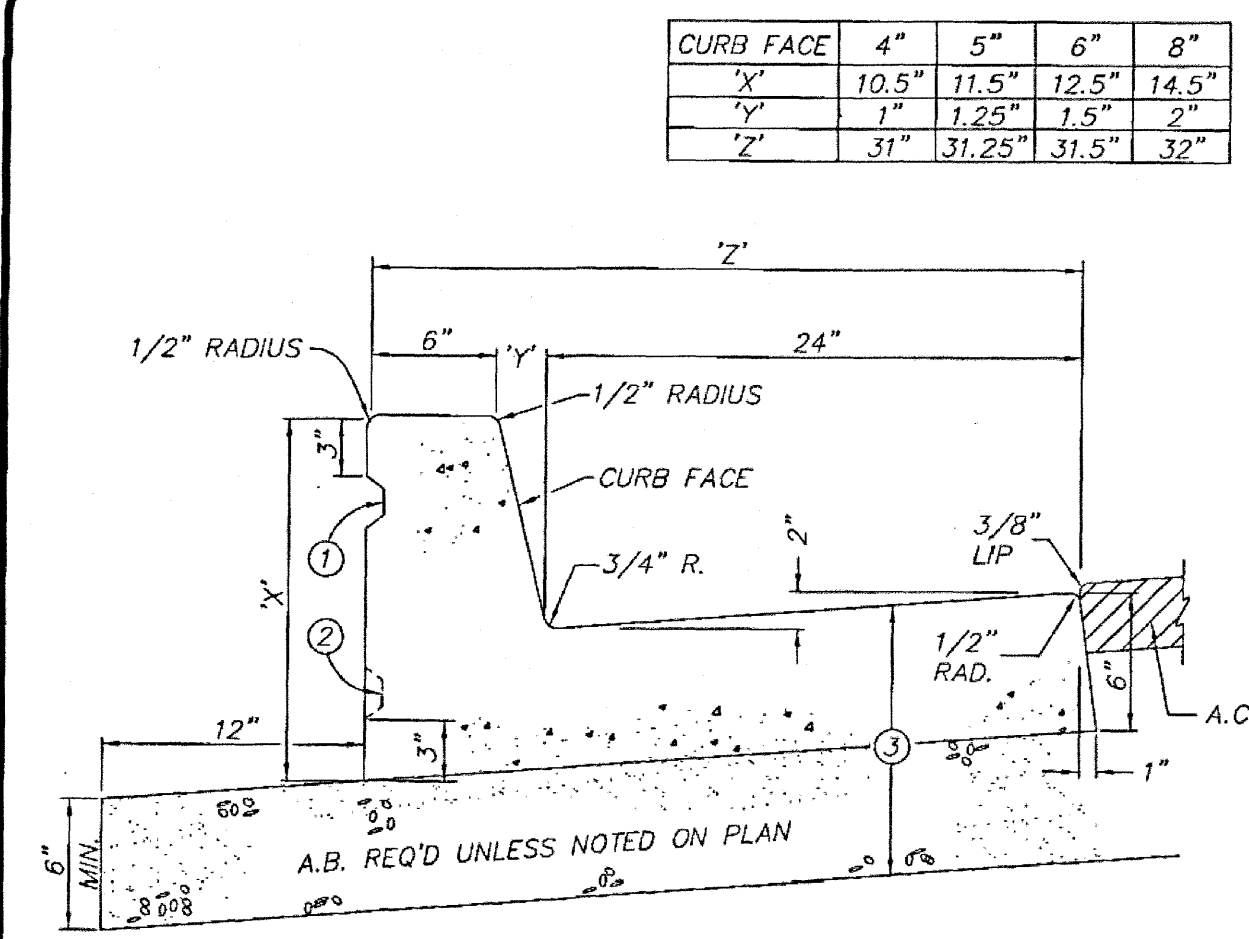

NOTES:

① CHAMFERED 1" X 2" KEY TO BE CONSTRUCTED WHEN CONCRETE SIDEWALK IS REQUIRED BACK OF CURB.

② KEY LOCATION AT DRIVEWAYS (0" CF).

③ WHEN CURB & CUTTER IS LOCATED ADJACENT TO CONCRETE BUS PAD, STRUCTURAL SECTION SHALL MATCH THAT OF BUS PAD.

A. INSTALL 12" LONG #4 REBAR DOWEL @ 24" O.C.
B. INSTALL LONGITUDINAL REBAR IN GUTTER PLATE, #4 @ 12" O.C.

GENERAL NOTES:

1. PROVIDE WEAKENED PLANE AT 10' MAX. SPACING AND AT DRIVE APPROACHES, B.C.'S, E.C.'S, CROSS GUTTERS AND CATCH BASIN TRANSITIONS.

2. 6" MINIMUM CURB FACE, UNLESS OTHERWISE APPROVED BY THE CITY ENGINEER

3. 8" CURB FACE ON ARTERIALS

APPROVED: CITY ENGINEER


CITY OF HUNTINGTON BEACH
DEPARTMENT OF PUBLIC WORKS

CURB AND GUTTER SECTION

REVISION DATE: May 2008

STANDARD PLAN 202
1 of 1

3 **HB STD 202**
NOT TO SCALE

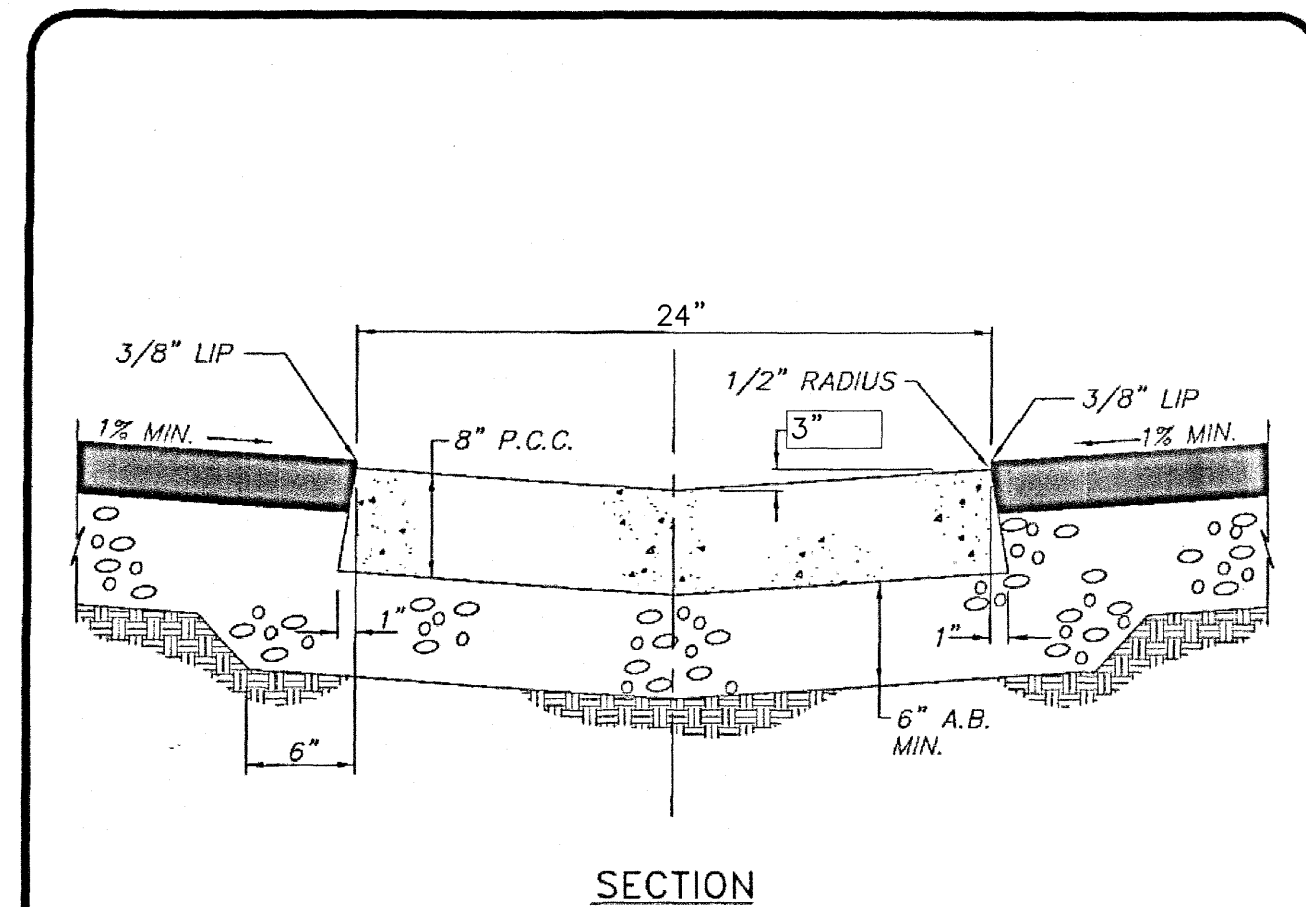

GENERAL NOTES:


1. WEAKENED PLANE OR QUICK JOINT, 20' O.C. MINIMUM.

2. DRIVE OR PARKING PAVEMENT SECTION SHALL BE AS DETERMINED BY SOIL REPORT.

24" LONGITUDINAL GUTTER

STANDARD PLAN 218
1 of 1

6 **MODIFIED HB STD 218**
NOT TO SCALE

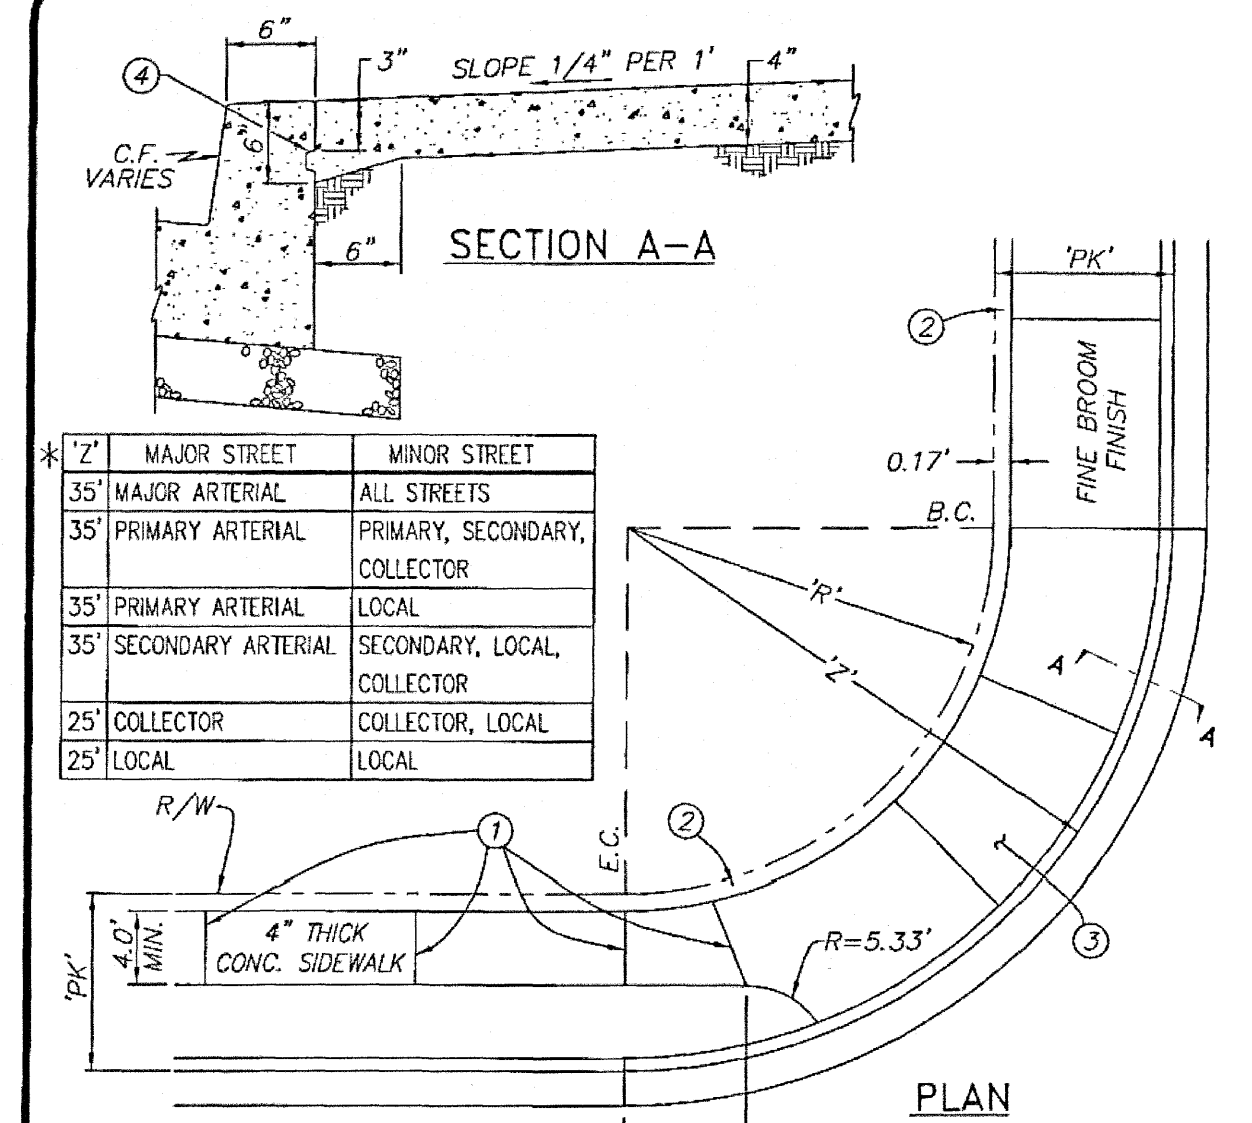

NOTES:

① WEAKENED PLANE JOINT AT 10' MAX. O.C.

② GROUT BETWEEN SIDEWALK AND BLOCKWALL.

③ CURB RAMP TO MEET CURRENT ADA STANDARDS.

④ CHAMFERED 1" X 2" KEY.

⑤ SIDEWALK WIDTH SHALL MEET CURRENT ADA STANDARDS.

GENERAL NOTES:

1. 'R' TO BE DETERMINED BY SUBTRACTING THE SMALLER 'PK' FROM 'Z'.

* UNLESS OTHERWISE APPROVED BY THE CITY ENGINEER.

APPROVED: CITY ENGINEER


CITY OF HUNTINGTON BEACH
DEPARTMENT OF PUBLIC WORKS

PARKWAY AND SIDEWALK

REVISION DATE: May 2008

STANDARD PLAN 207
1 of 1

9 **HB STD 207**
NOT TO SCALE

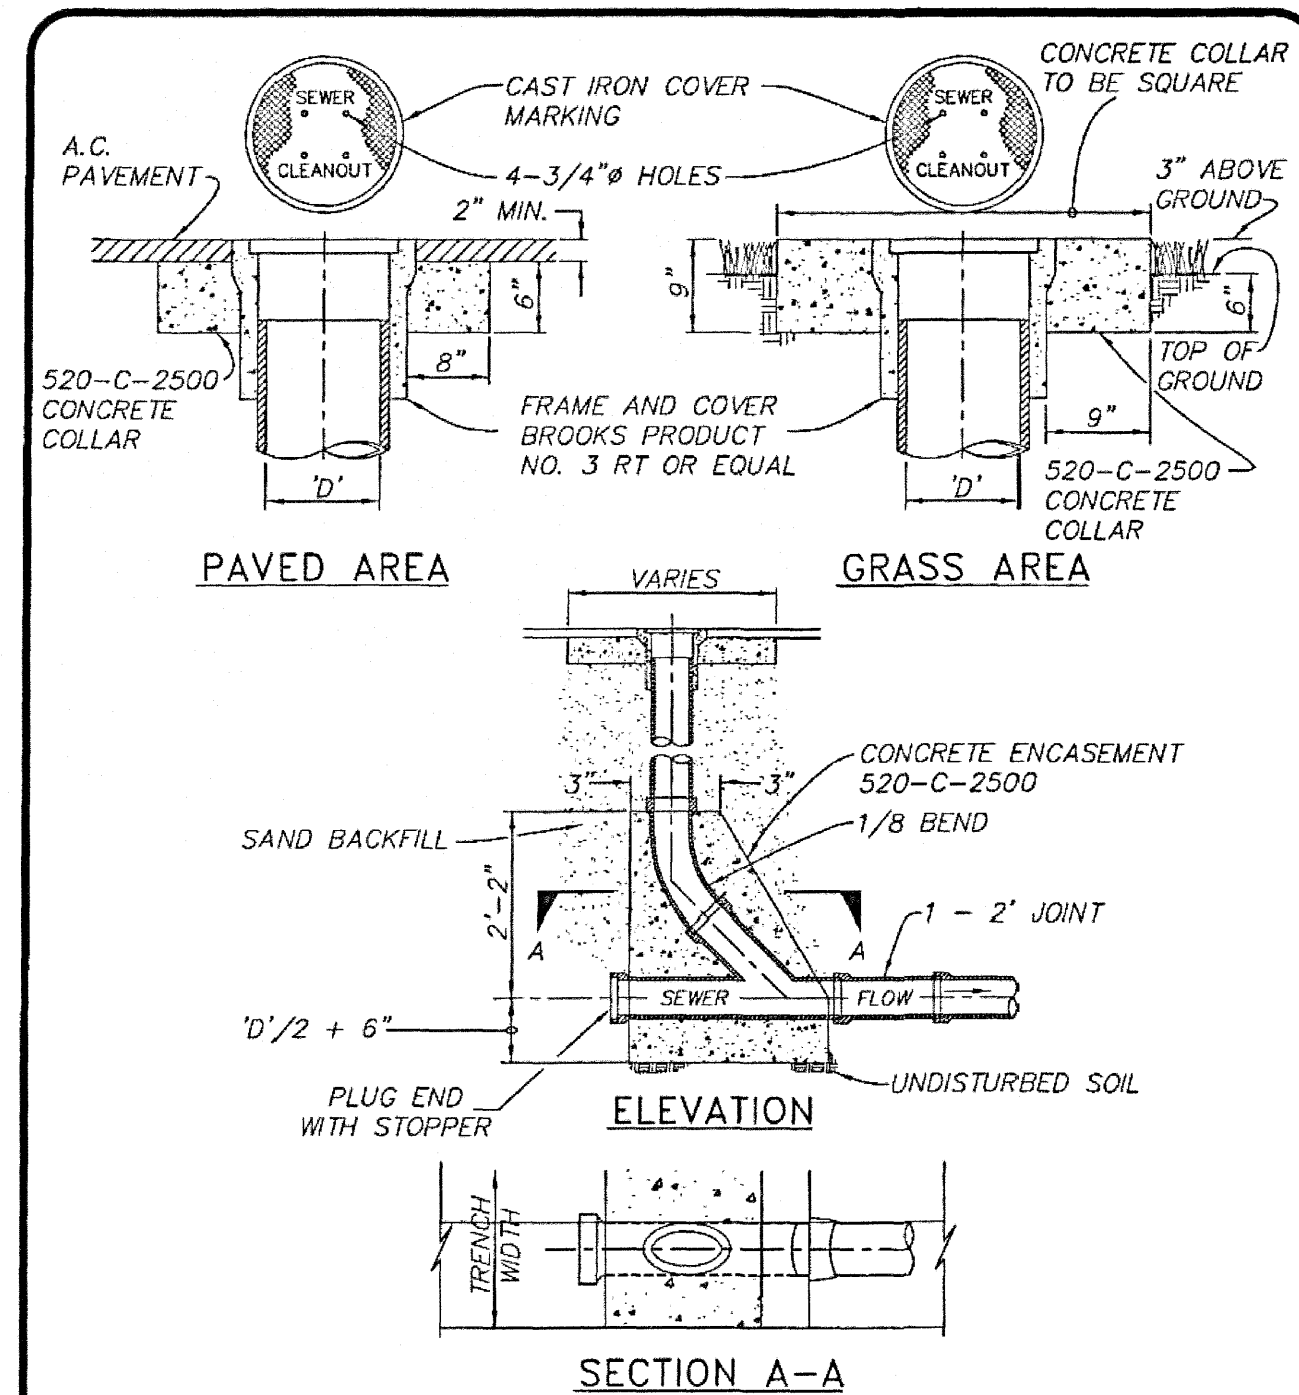

GENERAL NOTES:

1. CLEANOUT PIPE TO BE SAME SIZE AND KIND OF MATERIAL AS MAIN.

APPROVED: CITY ENGINEER


CITY OF HUNTINGTON BEACH
DEPARTMENT OF PUBLIC WORKS

STANDARD CLEAN-OUT SECTION

REVISION DATE: MAY 2008

STANDARD PLAN 508
1 of 1

15 **HB STD 508**
NOT TO SCALE

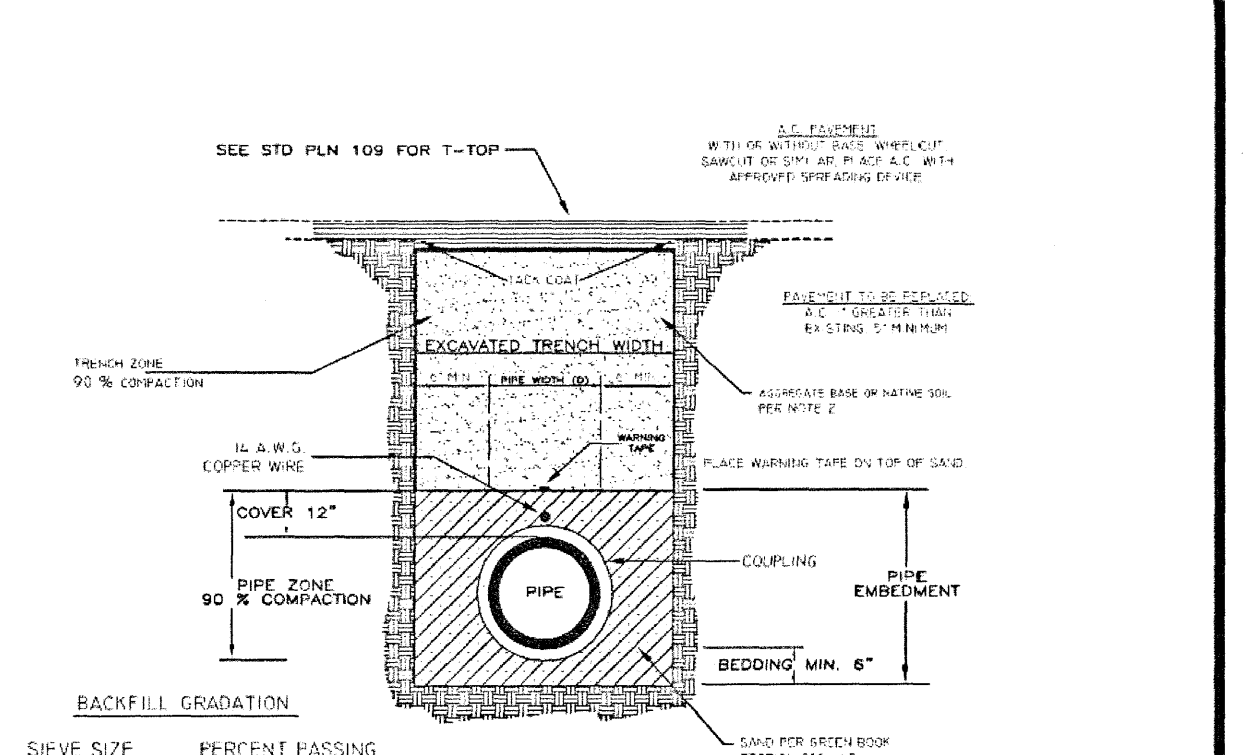

GENERAL NOTES:

① BACKFILL MATERIAL FOR ALL TRENCHES SHALL HAVE A CERTIFIED SAND EQUIVALENT OF NOT LESS THAN 25 AND SHALL CONFORM TO THE FOLLOWING GRADATION (SEE ABOVE).

② PROJECT EXCAVATION MAY BE USED AS BACKFILL MATERIAL IF IT MEETS THE REQUIREMENTS OF GREEN BOOK SECTION 306-1.3.1 SAND REQUIREMENT OF 25% MINIMUM. CONTRACTOR SHALL PAY TESTING LABORATORY TO CERTIFY BACKFILL.

③ COMPACTION METHODS SHALL CONFORM TO SECTIONS 301 AND 306-1.2 OF THE STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (LATEST EDITION) WITH THE EXCEPTION OF HYDRO-HAMMER.

④ ALL TRENCHING & CONSTRUCTION SHALL COMPLY WITH THE REQUIREMENTS OF THE STATE DIVISION OF INDUSTRIAL SAFETY.

⑤ WARNING TAPE SHALL BE 6" WIDE PLASTIC MARKER TAPE LABELED "CAUTION POTABLE WATER LINE BELOW" AND PLACED 12" ABOVE TOP OF PIPELINE.

⑥ MINIMUM COVER IS DEFINED ON STANDARD PLAN 600 SHEET 1 OF 8.

APPROVED: CITY ENGINEER

CITY OF HUNTINGTON BEACH
DEPARTMENT OF PUBLIC WORKS

TRENCHING AND RESURFACING
DETAIL FOR MINIMUM COVER OR GREATER OVER PIPE

REVISION DATE: 11/17/16

STANDARD PLAN 606A
1 of 1

37 **HB STD 606A**
NOT TO SCALE

Underground Service Alert

Call: TOLL FREE
1-800-422-4133

TWO WORKING DAYS BEFORE YOU DIG

REV.	DATE	BY	DESCRIPTION	APP'D

REV.	DATE	BY	DESCRIPTION	APP'D


PREPARED UNDER THE SUPERVISION OF:

R.C.E. NO.: 63249 EXP. DATE: 6/30/2022

DESIGNED BY:

CHECKED BY:

HUNTINGTON BEACH DEPT. OF PUBLIC WORKS

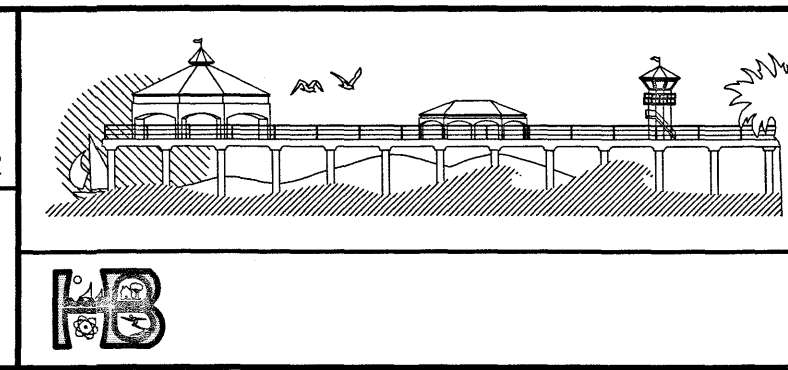

PRECISE GRADING PLAN

EMERGENCY HOMELESS SHELTER


STANDARD DETAILS
17631 CAMERON LANE
IN THE CITY OF HUNTINGTON BEACH

6
8



PART TYPE	ITEM ON LAYOUT	DESCRIPTION	INVERT	MAX FLOW
PREFABRICATED END CAP	A	24" BOTTOM CORED END CAP/TYP OF ALL 24" BOTTOM CONNECTIONS AND ISOLATOR ROWS	2.08'	
PREFABRICATED END CAP	B	12" TOP CORED END CAP/TYP OF ALL 12" TOP CONNECTIONS	26.40'	
MANIFOLD	C	12" X 12" TOP MANIFOLD, ADS N-12	26.36'	
NYLOPLAST (INLET W/ISO ROW)	D	30" DIAMETER (24.00" SUMP MIN)		2.5 CFS IN
INSPECTION PORT	E	4" SEE DETAIL (TYP 2 PLACES)		

CONCEPTUAL ELEVATIONS	
MAXIMUM ALLOWABLE GRADE (TOP OF PAVEMENT/UNPAVED)	12.50
MINIMUM ALLOWABLE GRADE (UNPAVED WITH TRAFFIC)	7.00
MINIMUM ALLOWABLE GRADE (UNPAVED NO TRAFFIC)	6.00
MINIMUM ALLOWABLE GRADE (TOP OF RIGID CONCRETE PAVEMENT)	6.00
MINIMUM ALLOWABLE GRADE (BASE OF FLEXIBLE PAVEMENT)	5.50
TOP OF STONE	4.50
TOP OF MC-3500 CHAMBER	4.50
12" X 12" TOP MANIFOLD INVERT	2.50
24" ISOLATOR ROW INVERT	0.50
BOTTOM OF MC-3500 CHAMBER	0.75
BOTTOM OF STONE	0.00

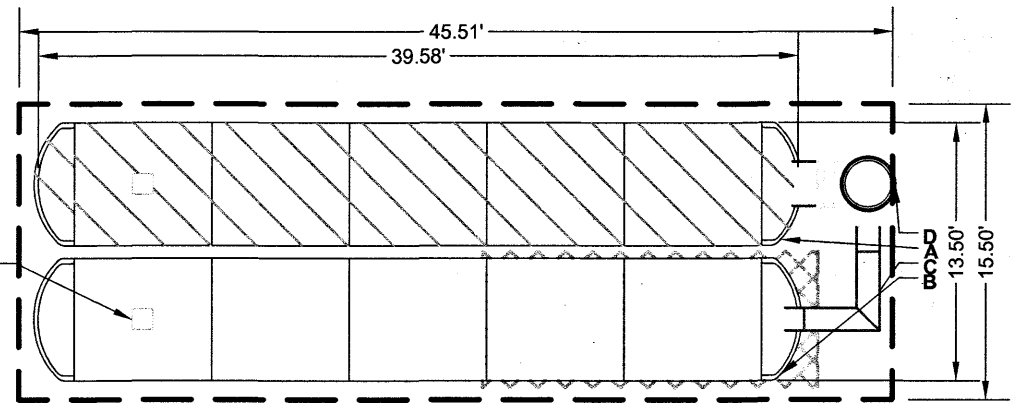

NOTES

- MANIFOLD SIZE TO BE DETERMINED BY SITE DESIGN ENGINEER. SEE TECH SHEET #7 FOR MANIFOLD SIZING GUIDANCE.
- DUE TO THE ADAPTATION OF THIS CHAMBER SYSTEM TO SPECIFIC SITE AND DESIGN CONSTRAINTS, IT MAY BE NECESSARY TO CUT AND COUPLE ADDITIONAL PIPE TO STANDARD MANIFOLD COMPONENTS IN THE FIELD.
- THE SITE DESIGN ENGINEER MUST REVIEW ELEVATIONS AND IF NECESSARY ADJUST GRADING TO ENSURE THE CHAMBER COVER REQUIREMENTS ARE MET.
- THIS CHAMBER SYSTEM WAS DESIGNED WITHOUT SITE-SPECIFIC INFORMATION ON SOIL CONDITIONS OR BEARING CAPACITY. THE SITE DESIGN ENGINEER IS RESPONSIBLE FOR DETERMINING THE SUITABILITY OF THE SOIL AND PROVIDING THE BEARING CAPACITY OF THE INSTALLED SOIL. THE BASE STONE DEPTH MAY BE INCREASED OR DECREASED ONCE THIS INFORMATION IS PROVIDED.
- NOT FOR CONSTRUCTION

- ISOLATOR ROW (SEE DETAIL)
- PLACE MINIMUM 17.50' OF ADS GEOSYNTHETICS 315WTM WOVEN GEOTEXTILE OVER BEDDING STONE AND UNDERNEATH CHAMBER FEET FOR COVER PROTECTION AT ALL CHAMBER INLET ROWS
- BED LIMITS


CAMERON SITE DETENTION SYSTEM

1

PLAN VIEW LAYOUT

PROPOSED ELEVATIONS

MAXIMUM ALLOWABLE GRADE:	31.45
MINIMUM ALLOWABLE GRADE:	25.95
TOP OF STONE:	24.45
TOP OF MC-3500 CHAMBER:	23.45
BOTTOM OF MC-3500 CHAMBER:	19.70
BOTTOM OF STONE:	18.95
NUMBER OF CHAMBERS:	10
NUMBER OF END CAPS:	4
SYSTEM VOLUME (PERIMETER)	2,248 CF

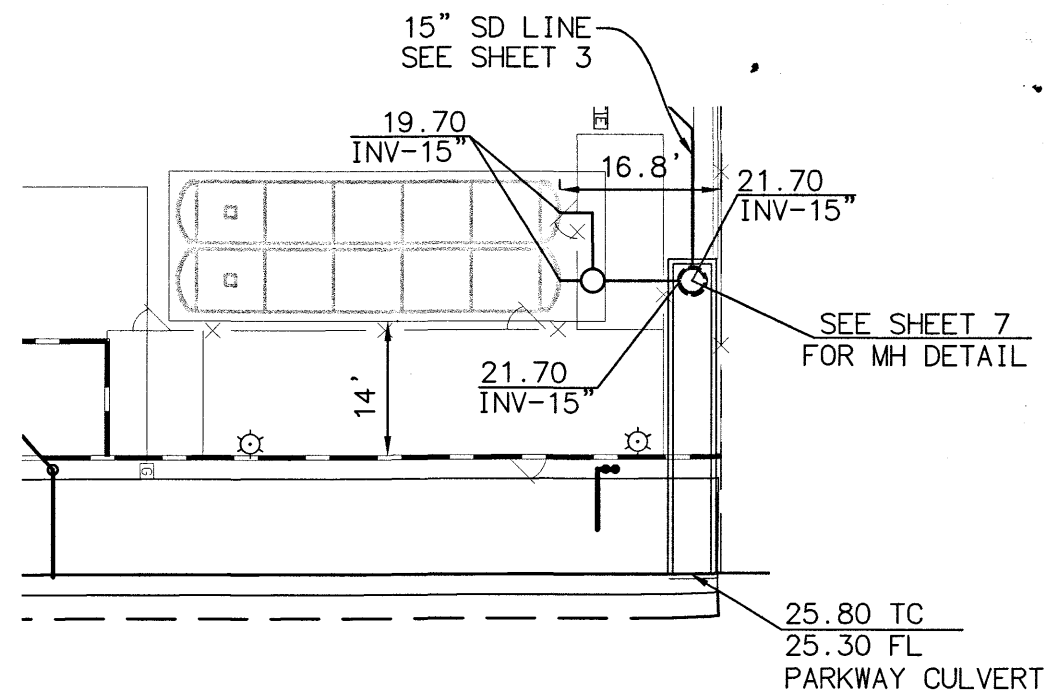

CONTRACTOR SHALL NOT INSTALL STORMTECH SYSTEM UNTIL A PRE-CONSTRUCTION MEETING HAS BEEN HELD WITH THE MANUFACTURERS REPRESENTATIVE, GEOTECHNICAL ENGINEER, AND CIVIL ENGINEER.

MC-3500 STORMTECH CHAMBER SPECIFICATIONS

- CHAMBERS SHALL BE STORMTECH MC-3500.
- CHAMBERS SHALL BE ARCH-SHAPED AND SHALL BE MANUFACTURED FROM VIRGIN, IMPACT-MODIFIED POLYPROPYLENE COPOLYMERS.
- CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F2418-16a, "STANDARD SPECIFICATION FOR POLYPROPYLENE (PP) CORRUGATED WALL STORMWATER COLLECTION CHAMBERS" CHAMBER CLASSIFICATION 45x76 DESIGNATION SS.
- CHAMBER ROWS SHALL PROVIDE CONTINUOUS, UNOBSTRUCTED INTERNAL SPACE WITH NO INTERNAL SUPPORTS THAT WOULD IMPEDE FLOW OR LIMIT ACCESS FOR INSPECTION.
- THE STRUCTURAL DESIGN OF THE CHAMBERS, THE STRUCTURAL BACKFILL AND THE INSTALLATION REQUIREMENTS SHALL ENSURE THAT THE LOAD FACTORS SPECIFIED IN THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, SECTION 12.12, ARE MET FOR: 1) LONG-DURATION DEAD LOADS AND 2) SHORT-DURATION LIVE LOADS, BASED ON THE AASHTO DESIGN TRUCK WITH CONSIDERATION FOR IMPACT AND MULTIPLE VEHICLE PRESENCES.
- CHAMBERS SHALL BE DESIGNED, TESTED AND ALLOWABLE LOAD CONFIGURATIONS DETERMINED IN ACCORDANCE WITH ASTM F2787, "STANDARD PRACTICE FOR STRUCTURAL DESIGN OF THERMOPLASTIC CORRUGATED WALL STORMWATER COLLECTION CHAMBERS". LOAD CONFIGURATIONS SHALL INCLUDE: 1) INSTANTANEOUS (<1 MIN) AASHTO DESIGN TRUCK LIVE LOAD ON MINIMUM COVER 2) MAXIMUM PERMANENT (75-YR) COVER LOAD AND 3) ALLOWABLE COVER WITH PARKED (1-WEEK) AASHTO DESIGN TRUCK.
- REQUIREMENTS FOR HANDLING AND INSTALLATION:
 - TO MAINTAIN THE WIDTH OF CHAMBERS DURING SHIPPING AND HANDLING, CHAMBERS SHALL HAVE INTEGRAL, INTERLOCKING STACKING LUGS.
 - TO ENSURE A SECURE JOINT DURING INSTALLATION AND BACKFILL, THE HEIGHT OF THE CHAMBER JOINT SHALL NOT BE LESS THAN 3".
 - TO ENSURE THE INTEGRITY OF THE ARCH SHAPE DURING INSTALLATION, a) THE ARCH STIFFNESS CONSTANT AS DEFINED IN SECTION 6.2.8 OF ASTM F2418 SHALL BE GREATER THAN OR EQUAL TO 500 LBS/IN/IN. AND b) TO RESIST CHAMBER DEFORMATION DURING INSTALLATION AT ELEVATED TEMPERATURES (ABOVE 73° F / 23° C), CHAMBERS SHALL BE PRODUCED FROM REFLECTIVE GOLD OR YELLOW COLORS.
- ONLY CHAMBERS THAT ARE APPROVED BY THE SITE DESIGN ENGINEER WILL BE ALLOWED. UPON REQUEST BY THE SITE DESIGN ENGINEER OR OWNER, THE CHAMBER MANUFACTURER SHALL SUBMIT A STRUCTURAL EVALUATION FOR APPROVAL BEFORE DELIVERING CHAMBERS TO THE PROJECT SITE AS FOLLOWS:
 - THE STRUCTURAL EVALUATION SHALL BE SEALED BY A REGISTERED PROFESSIONAL ENGINEER.
 - THE STRUCTURAL EVALUATION SHALL DEMONSTRATE THAT THE SAFETY FACTORS ARE GREATER THAN OR EQUAL TO 1.95 FOR DEAD LOAD AND 1.75 FOR LIVE LOAD, THE MINIMUM REQUIRED BY ASTM F2787 AND BY SECTIONS 6.2.8 AND 12.12 OF THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS FOR THERMOPLASTIC PIPE.
 - THE TEST DERIVED CREEP MODULUS AS SPECIFIED IN ASTM F2418 SHALL BE USED FOR PERMANENT DEAD LOAD DESIGN EXCEPT THAT IT SHALL BE THE 75-YEAR MODULUS USED FOR DESIGN.
- CHAMBERS AND END CAPS SHALL BE PRODUCED AT AN ISO 9001 CERTIFIED MANUFACTURING FACILITY.

4

MC-3500 NOTES

INSPECTION & MAINTENANCE


- STEP 1) INSPECT ISOLATOR ROW FOR SEDIMENT
- A. INSPECTION PORTS (IF PRESENT)
- A.1. REMOVE/OPEN LID ON NYLOPLAST INLINE DRAIN
- A.2. REMOVE AND CLEAN FLYSTORM FILTER IF INSTALLED
- A.3. USING A FLASHLIGHT AND STADIA ROD, MEASURE DEPTH OF SEDIMENT AND RECORD ON MAINTENANCE LOG
- A.4. LOWER A CAMERA INTO ISOLATOR ROW FOR VISUAL INSPECTION OF SEDIMENT LEVELS (OPTIONAL)
- A.5. IF SEDIMENT IS AT, OR ABOVE, 3" (80 mm) PROCEED TO STEP 2. IF NOT, PROCEED TO STEP 3.
- B. ALL ISOLATOR ROWS
- B.1. REMOVE COVER FROM STRUCTURE AT UPSTREAM END OF ISOLATOR ROW USING A FLASHLIGHT. INSPECT DOWN THE ISOLATOR ROW THROUGH OUTLET PIPE
- B.2. IF MIRRORS OR POLES OR CAMERAS MAY BE USED TO AVOID A CONFINED SPACE ENTRY
- B.3. FOLLOW OSHA REGULATIONS FOR CONFINED SPACE ENTRY IF ENTERING MANHOLE
- B.3. IF SEDIMENT IS AT, OR ABOVE, 3" (80 mm) PROCEED TO STEP 2. IF NOT, PROCEED TO STEP 3.
- STEP 2) CLEAN OUT ISOLATOR ROW USING THE JETVAC PROCESS
- A. A FIXED CULVERT CLEANING NOZZLE WITH REAR FACING SPREAD OF 45° (1.1 m) OR MORE IS PREFERRED
- B. A VACUUM STRUCTURE SUMP AS REQUIRED
- STEP 3) REPLACE ALL COVERS, GRATES, FILTERS, AND LIDS; RECORD OBSERVATIONS AND ACTIONS.
- STEP 4) INSPECT AND CLEAN BASINS AND MANHOLES UPSTREAM OF THE STORMTECH SYSTEM.

NOTES

- INSPECT EVERY 6 MONTHS DURING THE FIRST YEAR OF OPERATION. ADJUST THE INSPECTION INTERVAL BASED ON PREVIOUS OBSERVATIONS OF SEDIMENT ACCUMULATION AND HIGH WATER ELEVATIONS.
- CONDUCT JETTING AND VACUUMING ANNUALLY OR WHEN INSPECTION SHOWS THAT MAINTENANCE IS NECESSARY.

5

MC-3500 INSPECTION PORT DETAIL

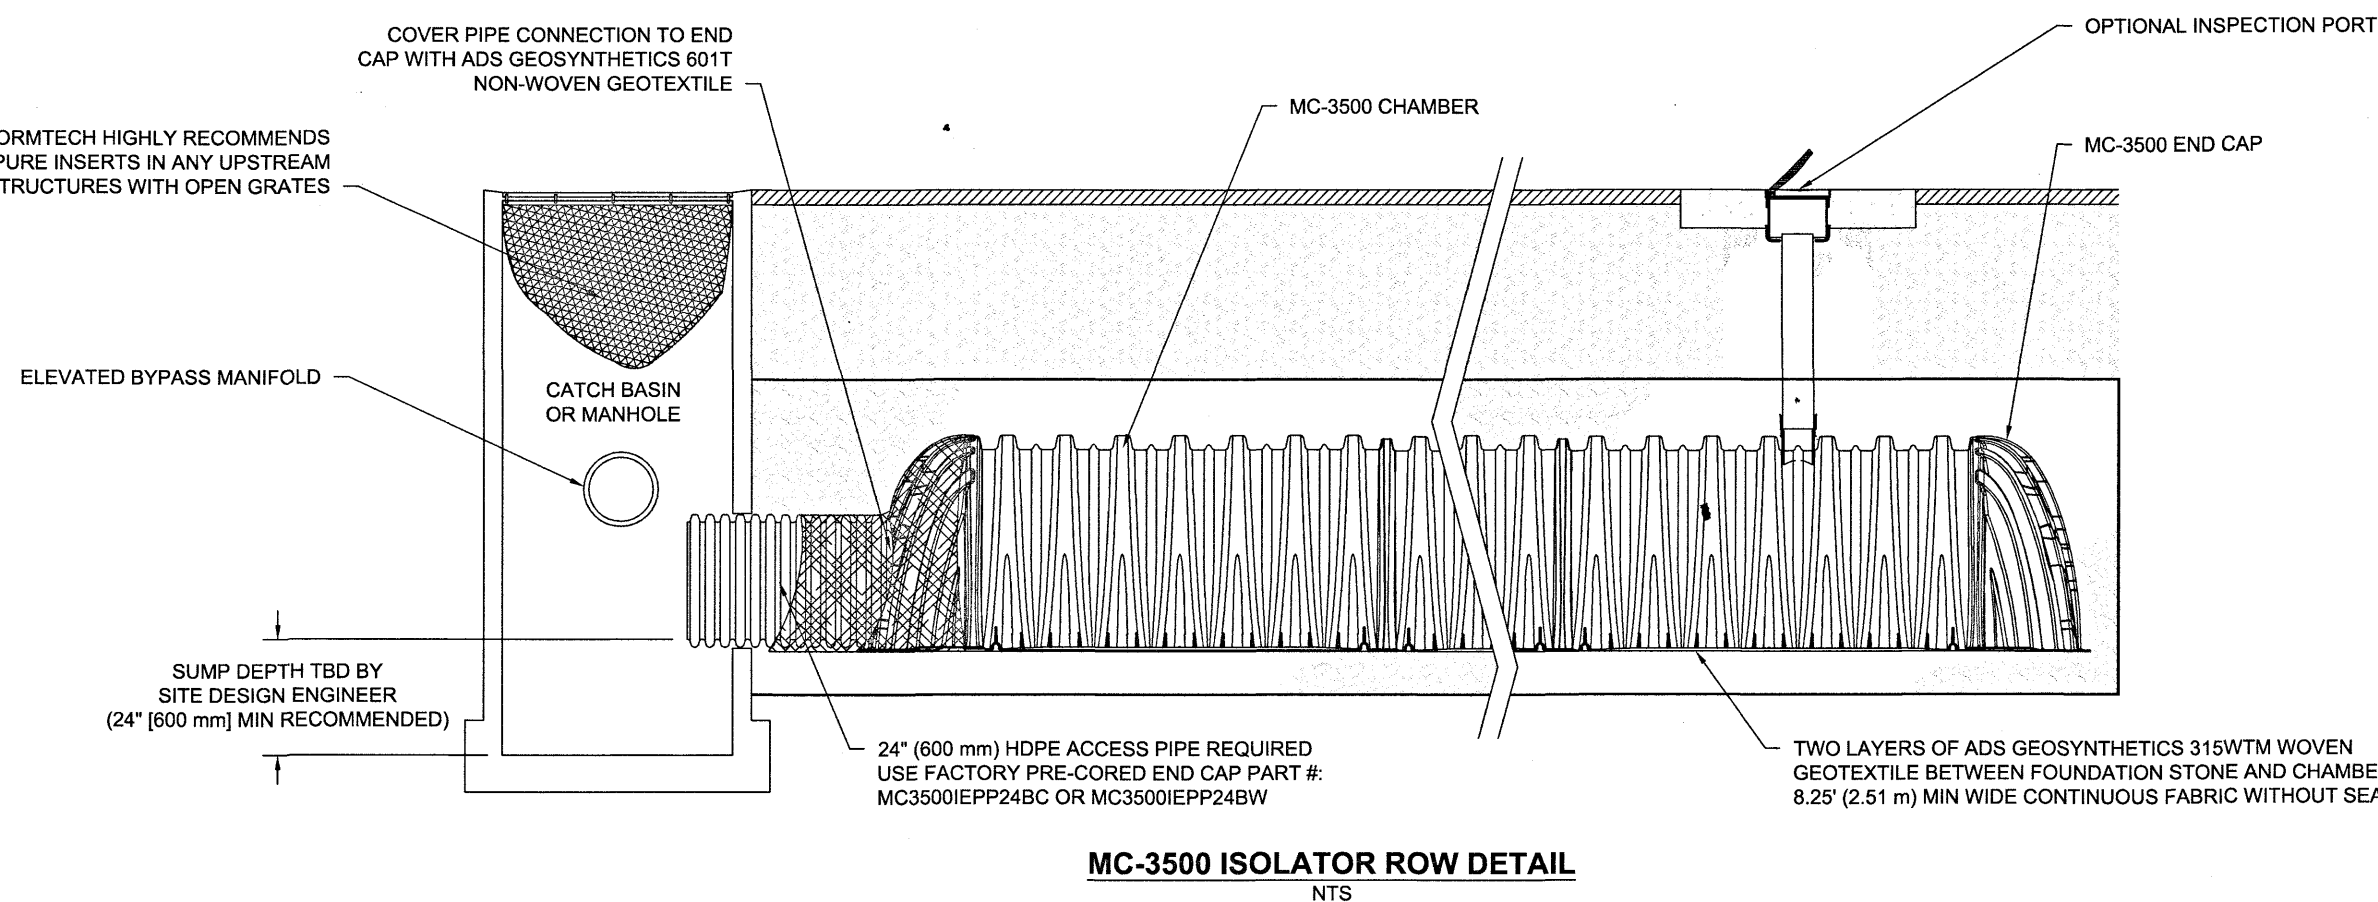

MC-3500 ISOLATOR ROW DETAIL


8

MC-3500 STANDARD CROSS SECTION

2

MC-3500 ELEVATIONS

UNDERDRAIN DETAIL

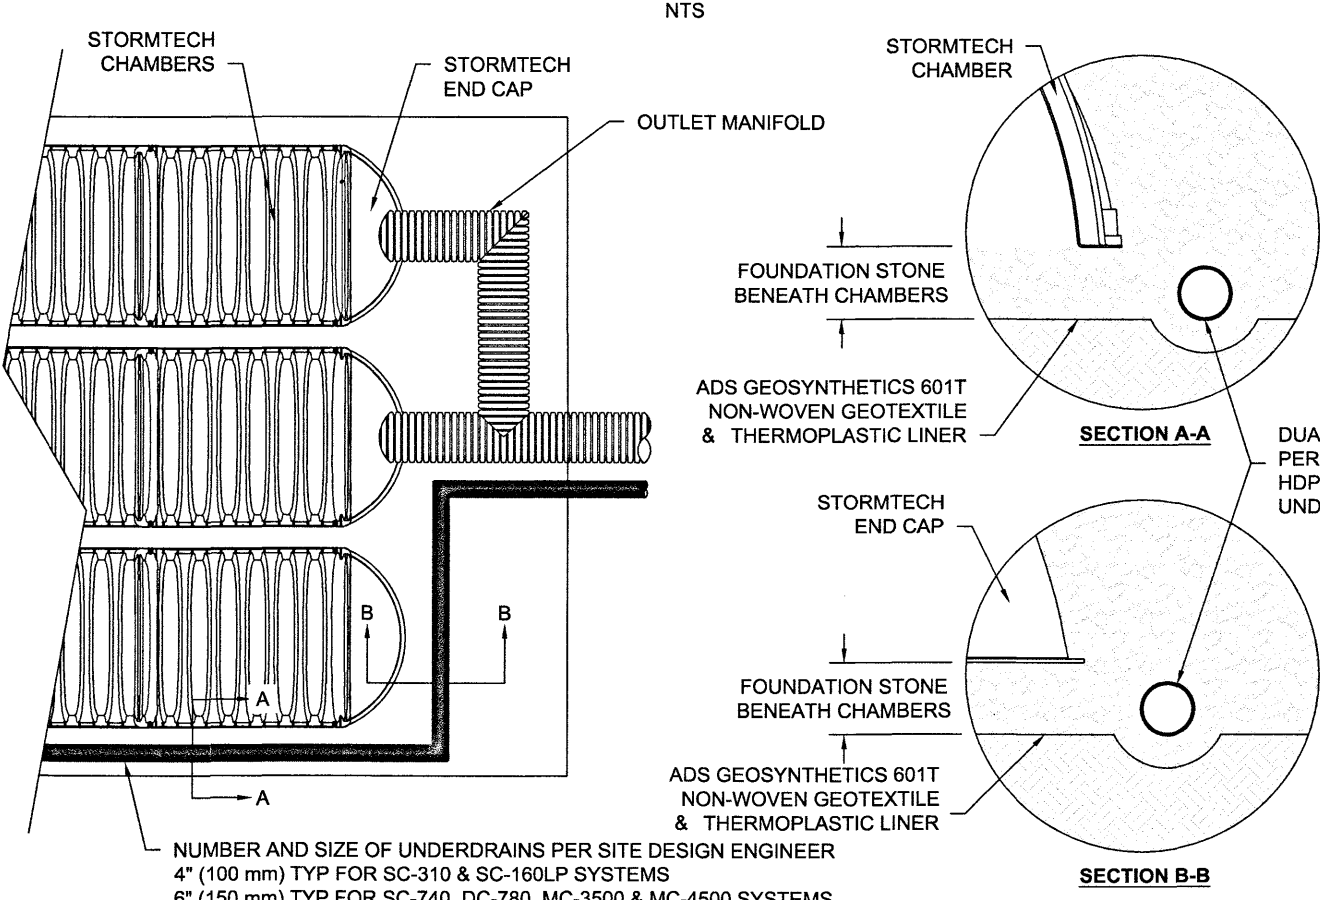

3

UNDERDRAIN DETAIL




REV.	DATE	BY	DESCRIPTION	APP'D

REFERENCES

DRAWN BY:	TM	08/20
DESIGNED BY:	JB	08/20
CHECKED BY:	MMJ	08/20

PREPARED UNDER THE SUPERVISION OF:	
R.C.E. NO.:	63249
EXP. DATE:	6/30/2022
REVIEWED BY:	
DATE:	08/20/2022
LOCATION:	HUNTINGTON BEACH DEPT. OF PUBLIC WORKS

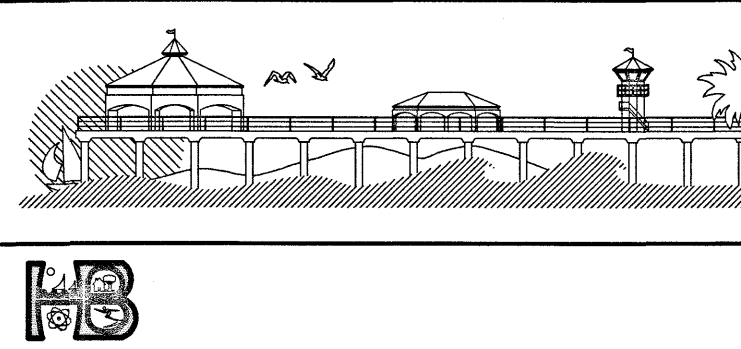

9

MC-3500 TECHNICAL SPEC.

PRECISE GRADING PLAN
EMERGENCY HOMELESS SHELTER
DRAINAGE DETAILS
17631 CAMERON LANE
IN THE CITY OF HUNTINGTON BEACH

8

8